


## PRODUCT DATA SHEET

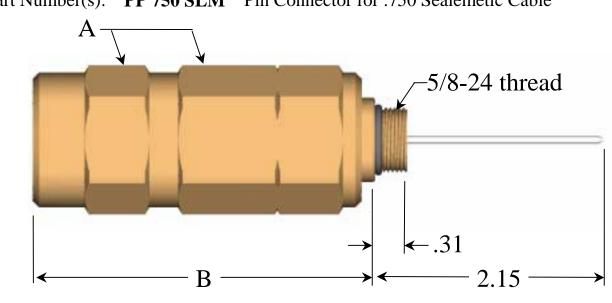

Part Number(s): **PP 750 SLM** Pin Connector for .750 Sealemetic Cable

## **Dimensions:**

- A Hex Dimension
- **B** Overall Length (installed)

1.312 inches (1 5/16") 3.29 inches

## **Operation Specification:**

Bandwidth Impedance Return Loss Insertion Loss Operating Voltage Rating Operating Current Rating Operating Temperature Range

0 MHz to 1 GHz 75 Ohms Better than -30 dB to 1 GHz Less than 0.10 dB to 1 GHz 90 Volts (@ 60 Hz continuous AC) 20 Amps (@ 60 Hz continuous AC) -40° to +140° F

## **Tooling Requirements:**

- Two (2) 1" wrenches
- Cutters for pin of connector
- Appropriate Cable preparation tool

Corporate Headquarters, 6176 East Molloy Road, East Syracuse, New York 13057 Tel: (315) 431-7200 or (800) 800-6652