


# Drop Ancillary

## WS500 - 1/2" F81 Weather Seal



When performance is on the line, don't sacrifice on environmental protection. Not all weather seals are made equal, and PPC's unique port seals offer best-in-class performance while still being easy to install. PPC weather seals protect both the port and the connector from moisture ingress, preventing corrosion and damage to the network.

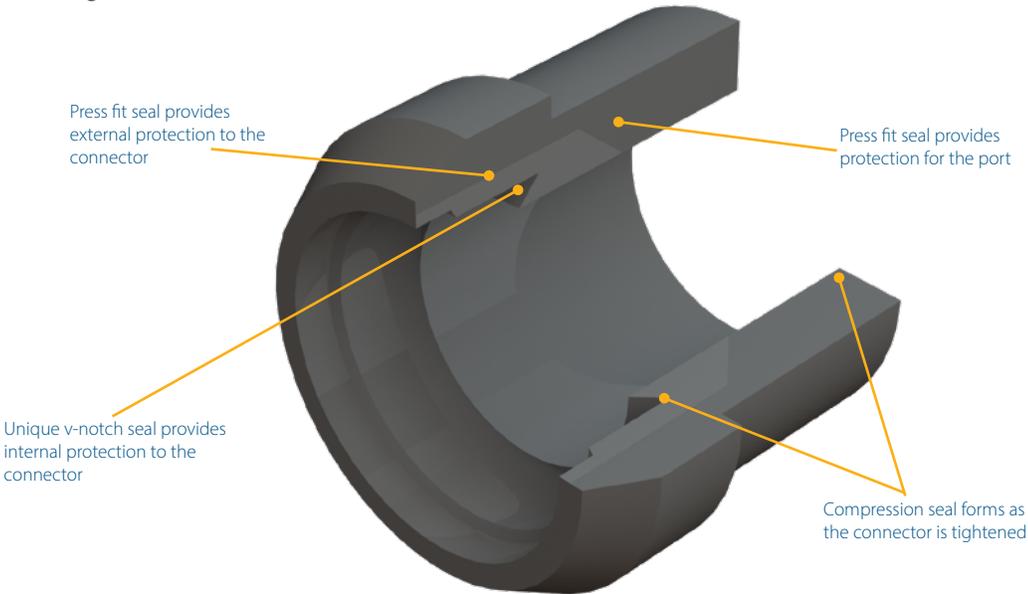

### Specifications

Material	60 durometer ethylene propylene compound
Operating Temperature Range	-70°F to +250°F (-57°C to 121°C)
Moisture Migration	Meets SCTE IPS-TP-013 when used with PPC approved products

*Meets or Exceeds all SCTE Specifications*

### Related Products



**WS375**  
3/8" Weather Seal



**EX6XLPLUS**  
RG6 Continuity® Connector



**EX6XLWSPLUS**  
RG6 AquaTight®/Continuity® Connector



**TR75S**  
Basic Terminator



**CF81GHZC**  
Outdoor F81 Adapter

*This product may be protected by one or more patents. For further information, please visit: [www.ppc-online.com/patents](http://www.ppc-online.com/patents)*