

PerfectFlex®

BROADBAND COAXIAL CABLE

75 Ohm Coaxial Cable
P6ET77VVPWRF



A BELDEN BRAND

GENERAL DESCRIPTION

6 Series, Perfect Prep®, Tri-shield, 77% Braid, Perfect Guard®, White PVC Jacket, NEC CATV Rated, Footage Marked, Reel Package

MECHANICAL SPECIFICATIONS

Center Conductor:	Copper-covered steel
Nominal Diameter:	0.040" (1.02 mm)
Dielectric:	Closed cell foamed polyethylene
Nominal Diameter	0.180" (4.57 mm)

SHIELD

1st Shield	APA-laminated tape bonded to dielectric
Nominal Diameter Over Tape:	0.188" (4.78 mm)
2nd Shield	34 AWG aluminum braid wire; 77% coverage
3rd Shield:	APA-laminated tape

JACKET

Jacket:	White PVC, Sunlight Resistant
Nominal Diameter Over Jacket:	.278" (7.06 mm)

PERFORMANCE SPECIFICATIONS

Attenuation (max corrected to 20°C)

Frequency (MHz)	Maximum (dB/100ft)	Maximum (dB/100m)
5	0.58	1.90
55	1.55	5.09
211	3.00	9.84
250	3.20	10.50
300	3.50	11.48
350	3.80	12.47
400	4.12	13.52
450	4.37	14.34
500	4.63	15.19
550	4.86	15.94
600	5.08	16.67
750	5.65	18.54
870	6.10	20.01
1000	6.54	21.46


PERFORMANCE SPECIFICATIONS

NEC Rated:	NEC CATV
Characteristic Impedence:	75 +/- 3 Ohms
Nominal Velocity Propagation:	85%



PACKAGING SPECIFICATIONS

Cable Length per Reel:	1,000 ft. (305 m)
Packaging Dimensions:	12" x 4" x 12" (30.5 x 10 x 30.5 cm)
Shipping Weight per Reel:	33 lbs./1,000 ft.

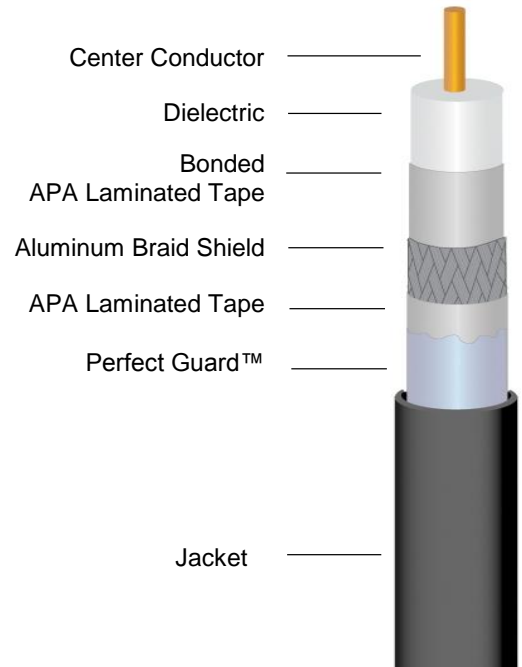

Unless otherwise specified, dimensions, material, electrical and mechanical specifications shall comply with ANSI SCTE 74
*Cable image for reference only. Please refer to jacket description for color.

This product may be protected by one or more patents • For further information, please visit: www.ppc-online.com/patents

6176 East Molloy Road | East Syracuse, NY 13057 | 1-800-800-6652 | ppc@ppc-online.com | www.ppc-online.com

