


Drop Ancillary

PST75IWS - 75Ω Locking Aquatight® Terminator w/Isolation



Poor electrical terminations caused by moisture migration wreak havoc on system performance. Common faulty 75 Ohm terminations caused by moisture result in service calls. The PST75IWS Drop Terminator incorporates a variety of enhancements allowing users to terminate, secure and isolate a drop, while keeping the moisture out, improving network performance and reducing costly service calls.

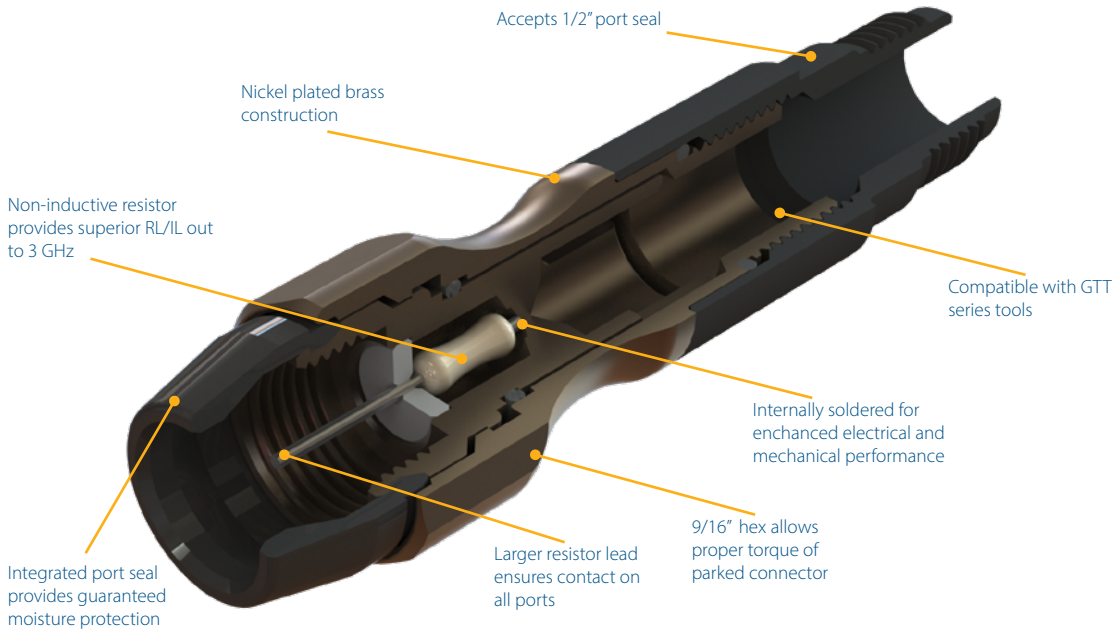

Specifications	
Return Loss	-30 dB to 3 GHz minimum
Shielding Effectiveness	-120 dB minimum
Corrosion Resistance	meets SCTE and Belcore per ATSM B117 (1000 hour salt fog)
Moisture Migration	Meets SCTE IPS-TP-013 (Red-dye moisture migration test)
<i>Meets or Exceeds all SCTE Specifications</i>	

Specifications for Isolation	
Resistance (electrical)	3.5E+13 Ohm
Isolation Withstand	>5,000 (VDC or VAC)
<i>Meets or Exceeds all SCTE Specifications</i>	

Related Products



GTT-7
Locking Terminator Tool



TR75SWS
Deluxe Terminator



PST75WS
AquaTight/Locking Terminator



PST75I
Locking/Isolation Terminator

This product may be protected by one or more patents. For further information, please visit: www.ppc-online.com/patents