

SignalTight™ MCX

The continuity solution



Universal MCX Connector for Dual Shield thru Quad Shield Mini Coax


SignalTight™ MCX Connector - Maximize performance for your headend

Achieves signal transmission approaching that of a fully-tightened connector.



SignalTight™ Technology

Continuity member provides superior shielding between connector and ATX Maxnet II Housing.

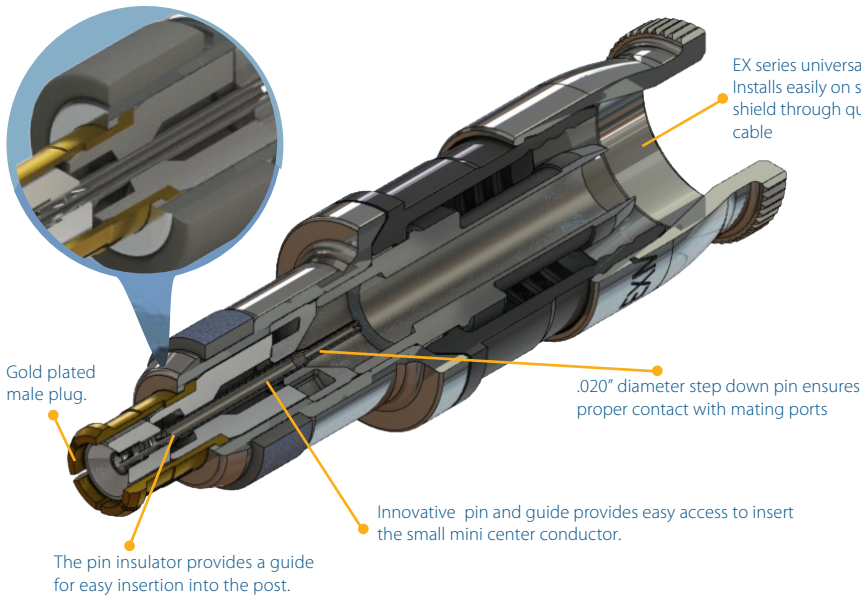

Product Specifications

Bandwidth	0 MHz to 3 GHz
Impedance	75 Ohms (nominal)
Return Loss	Minimum -30 dB to 3 GHz
Insertion Loss	Less than .10 dB to 3 GHz
Operating Voltage	90 V (at 60 Hz continuous AC)
Operating Temperature	-40° F to + 140° F (-40° C to 60° C)
Cable Retention	> 40 LBS.
Matting	500 Cycles Min.
RFI	> 100 dB

EXM-MCXPLUS



VT-HE



LDT-MINI



Part Number

EXM-MCXPLUS SignalTight, Mini Series, MCX Universal Connector

Preparation & Installation Tools

Compression Tool	VT-HE
1/4" - 1/4" universal drop cable preparation tool	LDTMINI