


# Hardline 2pc Connectors



## PP 1160 P3/TX

Pin Connector For 1160 P3/TX Cable

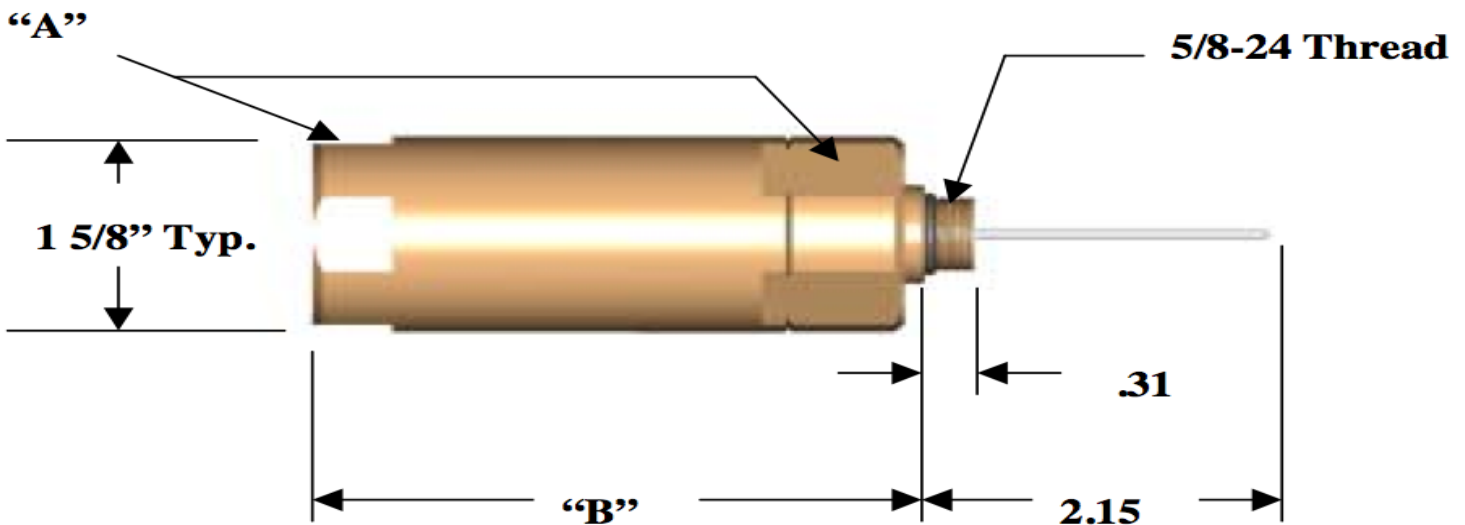

**Connector Dimensions:**  
A: Wrench Dimension 1.500"  
B: Overall Length 3.75"

**Cable Dimensions:**  
Nominal Center Conductor .269"  
Nominal Cable Outside 1.160"

### Product Specifications

Bandwidth	0 MHz to 1 GHz
Impedance	75 Ohms
Return Loss	Better than -30 dB to 1 GHz
Insertion Loss	Less than .10 dB to 1 GHz
Operating Voltage Rating	90 Volts (@ 60 Hz continuous AC)
Operating Current Rating	20 Amps (@ 60 Hz continuous AC)
Cable Retention Force	1025 pounds
Operating Temperature Range	-40 ° to + 140 ° F

Meets or Exceeds all SCTE Specifications

### Part Numbers

PP1160P3TX	Pin Connector For 1125 P3/TX Cable
------------	------------------------------------

### Preparation & Installation Tools

- Two(2) 1 1/2" Wrenches
- Cutters for pin of connector
- Appropriate Cable preparation tool