


Hardline

Right Angle Adapter

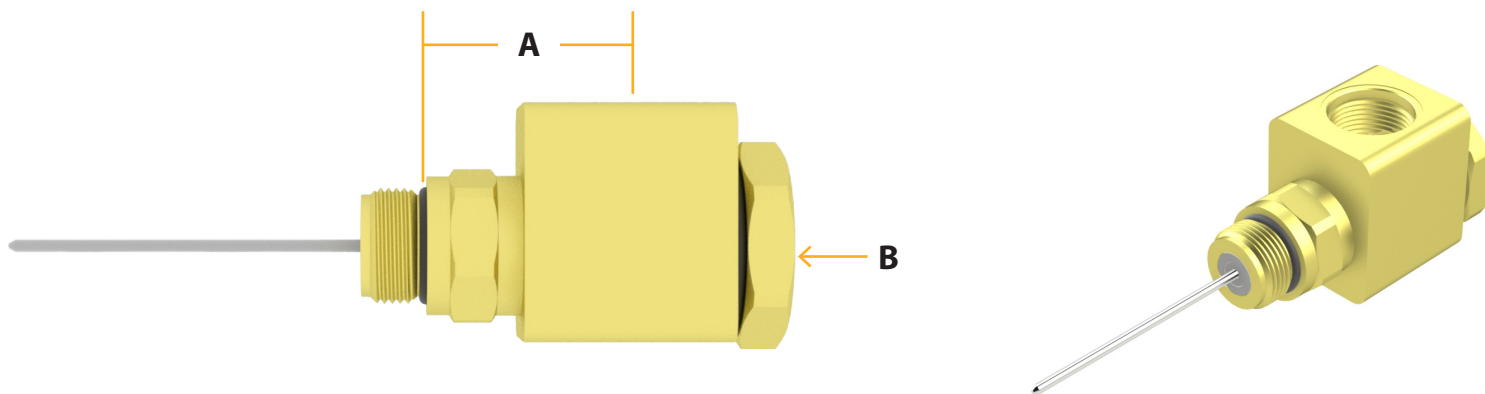

Mechanical Specifications (NX90 Family - Right angle adapter with self-seizing contact)

Connector	Connector Length (A) <i>(inches)</i>	Thread Size	Hex Size (B) <i>(inches)</i>	Pin Trim Length (C) <i>(inches)</i>
CP90	1.06	5/8-24 UNEF-2A	1	9/16

Electrical Specifications

Bandwidth	0 MHz to 3 GHz
Impedance	75 Ohms (nominal)
Return Loss	-30 dB to 1.218 GHz -22 dB to 1.794 GHz
Insertion Loss	-.25 dB to 1.794 GHz
Operating Voltage	90 V (at 60 Hz continuous AC)
Operating Current Rating	20 Amps (at 60 Hz continuous AC)
Operating Temperature	-40°F to + 140°F (-40°C to 60°C)

Meets or Exceeds all SCTE Specifications

Preparation & Installation Tools

One (1) 3/4" wrenches
Two (2) adjustable wrenches
Regular screw driver or 3/16" hex nut driver
Suitable wrenches for installing pin connector
Cutters for pin of connector

This product may be protected by one or more patents • For further information, please visit: www.ppc-online.com/patents

6176 E. Molloy Rd. East Syracuse, NY 13057 U.S.A. • customerservice@ppc-online.com • 1-800-800-6652 • +1 315-431-7200 • www.ppc-online.com