


# Hardline Right Angle Adapter

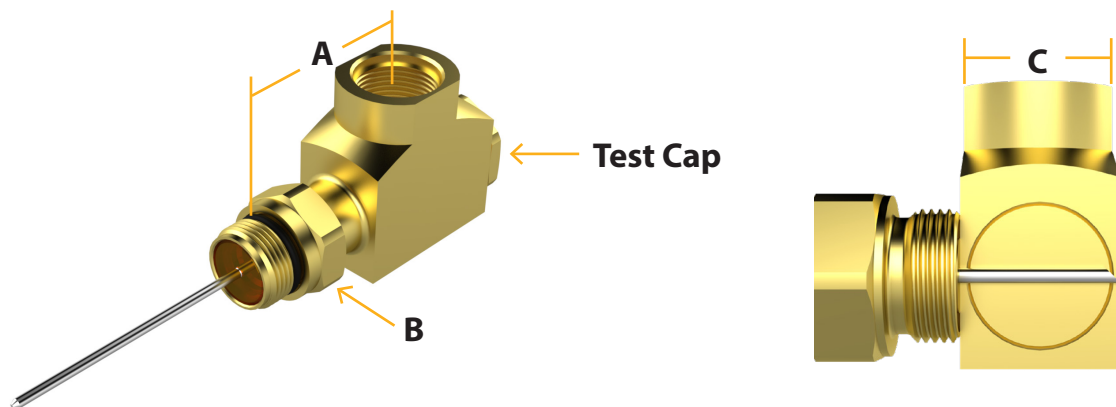

## Mechanical Specifications (NX90 Family - Right angle adapter with self-seizing contact)

Connector	Connector Length (A) <i>(inches)</i>	Thread Size	Hex Size (B) <i>(inches)</i>	Pin Trim Length (C) <i>(inches)</i>	Test Cap
NX90	1.28	5/8-24 UNEF-2A	3/4	3/4	No
NX901.5	2.78	5/8-24 UNEF-2A	3/4	3/4	No
NX903	4.28	5/8-24 UNEF-2A	3/4	3/4	No
NX904.5	5.78	5/8-24 UNEF-2A	3/4	3/4	No
NX906	7.28	5/8-24 UNEF-2A	3/4	3/4	No
NX909	10.28	5/8-24 UNEF-2A	3/4	3/4	No

## Mechanical Specifications (NX90T Family - Right angle adapter with self-seizing contact and test point)

Connector	Connector Length (A) <i>(inches)</i>	Thread Size	Hex Size (B) <i>(inches)</i>	Pin Trim Length (C) <i>(inches)</i>	Test Cap
NX90T	1.28	5/8-24 UNEF	3/4	3/4	Yes
NX90T1.5	2.78	5/8-24 UNEF	3/4	3/4	Yes
NX90T3	4.28	5/8-24 UNEF	3/4	3/4	Yes
NX90T4.5	5.78	5/8-24 UNEF	3/4	3/4	Yes
NX90T6	7.28	5/8-24 UNEF	3/4	3/4	Yes
NX90T9	10.28	5/8-24 UNEF	3/4	3/4	Yes


## Electrical Specifications

<b>Bandwidth</b>	0 MHz to 3 GHz
<b>Impedance</b>	75 Ohms (nominal)
<b>Return Loss</b>	-30 dB to 1 GHz
<b>Insertion Loss</b>	-.25 dB to 1 GHz
<b>Operating Voltage</b>	90 V (at 60 Hz continuous AC)
<b>Operating Current Rating</b>	20 Amps (at 60 Hz continuous AC)
<b>Operating Temperature</b>	-40°F to + 140°F (-40°C to 60°C)

*Meets or Exceeds all SCTE Specifications*

## Preparation & Installation Tools

- Two (2) adjustable wrenches
- Linemen's pliers or other appropriate cutters
- Appropriate cable preparation tools

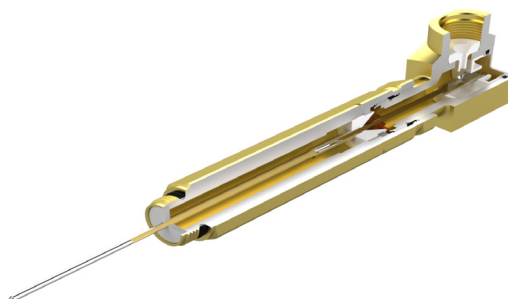

This product may be protected by one or more patents • For further information, please visit: [www.ppc-online.com/patents](http://www.ppc-online.com/patents)