


Hardline

Housing to Housing Swivel Adapter

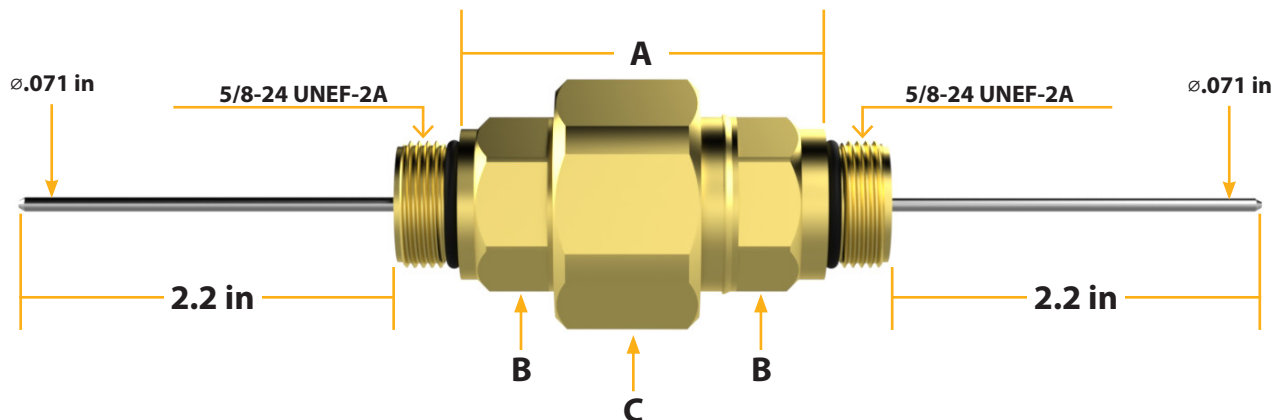

Mechanical Specifications

| Connector | Connector Length (A) Fully Tightened | Small Hex Size (B) | Large Hex Size (C) |
|-----------|---|-----------------------|-----------------------|
| | (inches) | (inches) | (inches) |
| CKSKSULT | 1.755 | 0.75 | 1.125 |


Preparation & Installation Tools

- Two (2) adjustable wrenches
- Linemen's pliers or other appropriate cutters
- Appropriate cable preparation tools

Electrical Specifications

| | |
|--------------------------|----------------------------------|
| Bandwidth | 0 MHz to 3 GHz |
| Impedance | 75 Ohms (nominal) |
| Return Loss | -25 dB to 1.794 GHz |
| Insertion Loss | -0.25 dB to 1.794 GHz |
| Operating Voltage | 90 V (at 60 Hz continuous AC) |
| Operating Current Rating | 20 Amps (at 60 Hz continuous AC) |
| Operating Temperature | -40°F to + 140°F (-40°C to 60°C) |

Meets or Exceeds all SCTE Specifications

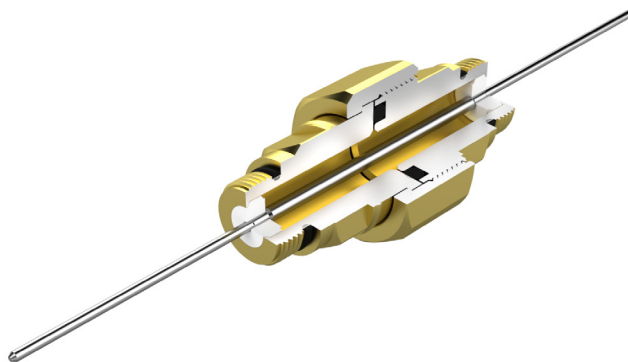

This product may be protected by one or more patents • For further information, please visit: www.ppc-online.com/patents

6176 E. Molloy Rd. East Syracuse, NY 13057 U.S.A. • customerservice@ppc-online.com • 1-800-800-6652 • +1 315-431-7200 • www.ppc-online.com