


Hardline

Housing to Housing Rotational Adapter

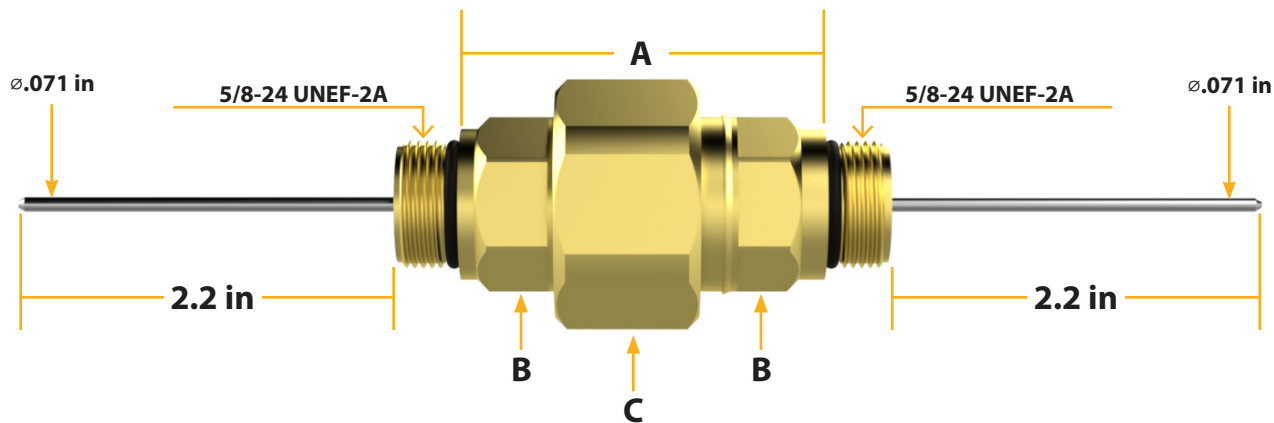

Mechanical Specifications

Connector	Connector Length (A) Fully Tightened	Small Hex Size (B)	Large Hex Size (C)
	(inches)	(inches)	(inches)
CKSKSULT	1.755	0.75	1.125


Preparation & Installation Tools

- Two (2) adjustable wrenches
- Linemen's pliers or other appropriate cutters
- Appropriate cable preparation tools

Electrical Specifications

Bandwidth	0 MHz to 3 GHz
Impedance	75 Ohms (nominal)
Return Loss	-25 dB to 1.794 GHz
Insertion Loss	-0.25 dB to 1.794 GHz
Operating Voltage	90 V (at 60 Hz continuous AC)
Operating Current Rating	20 Amps (at 60 Hz continuous AC)
Operating Temperature	-40°F to + 140°F (-40°C to 60°C)

Meets or Exceeds all SCTE Specifications

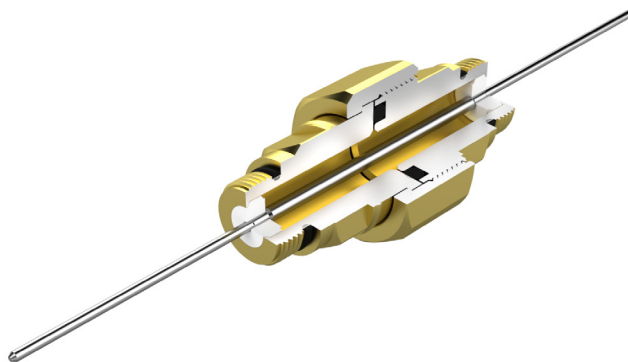

This product may be protected by one or more patents • For further information, please visit: www.ppc-online.com/patents

6176 E. Molloy Rd. East Syracuse, NY 13057 U.S.A. • customerservice@ppc-online.com • 1-800-800-6652 • +1 315-431-7200 • www.ppc-online.com