

Hardline

Splice Block: Self-Seizing Contacts



Mechanical Specifications

Connector	Test Point	Thread Size (A)	Hole Distance (B)	Thickness (C)	Height (D)	Width (E)	Hex Size (F)
		(in)	(in)	(in)	(in)	(in)	(in)
ISPB	No	5/8-24 UNEF-2B	2.5	0.75	1.375	3.75	.75
ISPBT	Yes	5/8-24 UNEF-2B	2.5	0.75	1.375	3.86	.75


Electrical Specifications

Bandwidth	0 Mhz to 3 GHz
Impedance	75 Ohms
Return Loss	-25 dB to 1.218 GHz
Insertion Loss	-0.25 dB to 1.218 GHz
Operating Voltage	90 V (at 60 Hz continuous AC)
Operating Current Rating	20 Amps (at 60 Hz continuous AC)
Operating Temperature	-40°F to + 140°F (-40°C to 60°C)

Meets or Exceeds all SCTE Specifications

Preparation & Installation Tools

- Two (2) adjustable wrenches
- Linemen's pliers or other appropriate cutters
- Appropriate cable preparation tools

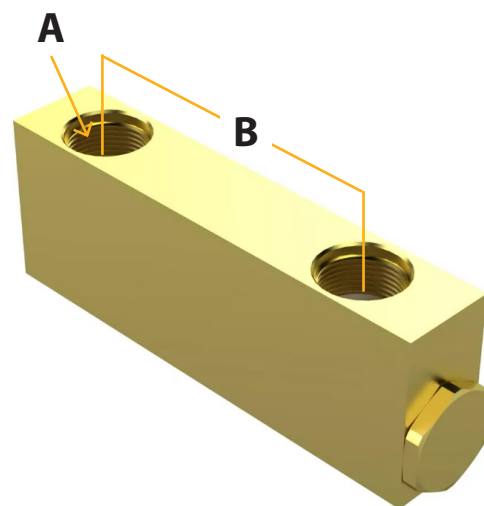

This product may be protected by one or more patents • For further information, please visit: www.ppc-online.com/patents

6176 E. Molloy Rd. East Syracuse, NY 13057 U.S.A. • customerservice@ppc-online.com • 1-800-800-6652 • +1 315-431-7200 • www.ppc-online.com