


# FutureLink® Patch Only Enclosures



## Features & Benefits

- Bulkhead with craft separation door holds 16 or 24 SC adapters
- Strength member tie-down and ground lug
- Door has push-to-latch, locking hasp & 216-tool security bolt
- Cable ports equipped with flat rubber grommets
- Molded-in feet for easy wall mounting
- Pole mountable with Pole Mount Bracket kit (SFIT- POLEMTG-10)
- Designed for indoor and outdoor use
- A variety of cable port nozzles are available

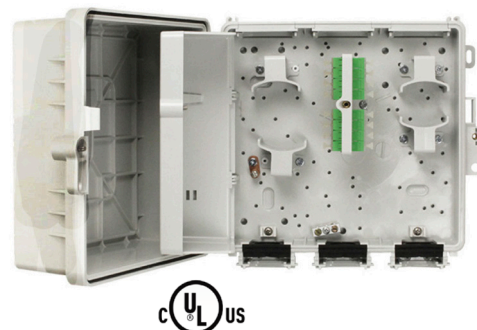

## Overview

The PPC® FutureLink® family of enclosures offers a flexible and cost-effective solution for fiber network deployments. Craft-friendly, expandable “grow as you go” designs support both greenfield and brownfield projects, and can be used for indoor or outdoor applications. These patch-only enclosures are designed for use with pre-terminated cables for fast, easy, cost-effective deployments. The bulkhead contains 4 to 24 SC adapters. These enclosures can be installed in an indoor IDF closet, or on the outside wall of smaller MDUs as a demarcation point. They can be stacked with other SFIT enclosures, such as a slack storage enclosure, to provide additional functionality.

## Technical Data

Specification	Value
Dimensions (W x H x D)	6.0 in x 10.0 in x 4.7 in (152.4 mm x 254.0 mm x 119.4 mm) 9.0 in x 10.0 in x 4.7 in (228.6 mm x 254.0 mm x 119.4 mm)
Materials	UL 94V-0 (indoor) and UL 94-5VA (outdoor), flame retardant PBT/PC blend thermoplastic, light gray
Safety	UL1863
Performance	Change Performance to read: Designed to meet GR-049-CORE, GR-3125-CORE & GR-2898-CORE

## Ordering Information

Part Number	Description
SNID-F308AXNN (APC) SNID-F308UXNN (UPC) (SFIT-compatible)	4 port SC Stackable Enclosure (10 in W x 6 in H x 5 in D) with three flat rubber grommets, single ground lug, double ground block, cable ties and bases, expandable to 16 ports
SNID-F616AXNN (APC) SNID-F16UXNN (UPC) (SFIT-compatible)	8 port SC Stackable Enclosure (10 in W x 9 in H x 5 in D) with three flat rubber grommets, single ground lug, double ground block, cable ties and bases, expandable to 24 ports
SFIT-FL12AXNN (APC) SNID-F612UXNN-CL (UPC) (SFIT-compatible)	12 port SC Stackable Enclosure (10 in W x 9 in H x 5 in D) with three flat rubber grommets, single ground lug, double ground block, cable ties and bases, expandable to 24 ports
SFIT-FL24AXNN (APC) SFIT-FL24UXNN (UPC)	24 port SC Stackable Enclosure (10 in W x 9 in H x 5 in D) with three flat rubber grommets, single ground lug, double ground block, cable ties and bases
ADPSCA6	Adapter Kit, SC-APC No Flange, Standard Grade, 6 per pack
ASUPC-03-N	Adapter Kit, SC-UPC No Flange, Standard Grade, 4 per pack

This product may be protected by one or more patents • For further information, please visit: [www.ppc-online.com/patents](http://www.ppc-online.com/patents)

customerservice@ppc-online.com • 1-800-800-6652 • [www.ppc-online.com](http://www.ppc-online.com)

# FutureLink® Patch Only Enclosures



## Features & Benefits

- Bulkhead with 24 to 144 SC adapters
- Door has push-to-latch, locking hasp and 216-tool security bolt (3)
- Four cable access ports with removable caps
- Ships with one or two rubber cone grommets/brush disks
- Includes four screw-on feet for easy wall mounting
- Can be pole-mounted with Pole Mount Bracket kit (UCS-PMB)
- Stackable design allows coupling with other UCS enclosures, such as Slack Storage, using SCC-UUF coupler kit (one per port)
- Designed for indoor and outdoor use



## Overview

The PPC® FutureLink® family of enclosures offers a flexible and cost-effective solution for fiber network deployments. Craft-friendly, expandable “grow as you go” designs support both greenfield and brownfield projects, and can be used for indoor or outdoor applications. These patch-only enclosures are designed for use with pre-terminated cables for fast, easy, cost-effective deployments. The bulkhead contains 24 to 144 SC adapters. These enclosures can be installed in an indoor IDF closet, or on the outside wall of smaller MDUs as a demarcation point. They can be stacked with other UCS enclosures, such as a slack storage enclosure, to provide additional functionality.

## Technical Data

Specification	Value
Dimensions (W x H x D)	14.0 in x 14.0 in x 8.0 in (355.6 mm x 355.6 mm x 203.2 mm)
Materials	UL 94V-0 (indoor) and UL 94-5VA (outdoor), flame retardant PBT/PC blend thermoplastic, light gray
Safety	UL1863
Performance	Designed to meet GR-049-CORE, GR-3125-CORE & GR-2898-CORE

## Ordering Information

Part Number	Description
UCS-FS72AXNN-JB (APC) UCS-FS72UXNN (UPC)	24 port SC UCS Enclosure (14 in W x 14 in H x 8 in D) with three 1.2-inch Closed Cap ports and one Rubber Cone Grommet port, expandable to 72 ports
UCS-FS48AXNNN-CL (APC) UCS-FS48UXNNN-CL (UPC)	48 port SC USC Enclosure (14 in W x 14 in H x 8 in D) with two 1.2-inch Closed Cap ports on top and two Rubber Cone Grommet ports on bottom, expandable to 144 ports
UCS-FS72AXNNN-CL (APC) UCS-FS72UXNNN-CL (UPC)	72 port SC USC Enclosure (14 in W x 14 in H x 8 in D) with two 1.2-inch Closed Cap ports on top and two Rubber Cone Grommet ports on bottom, expandable to 144 ports
UCS-FS96AXNNN-CL (APC) UCS-FS96UXNNN-CL (UPC)	96 port SC USC Enclosure (14 in W x 14 in H x 8 in D) with two 1.2-inch Closed Cap ports on top and two Rubber Cone Grommet ports on bottom, expandable to 144 ports
UCS-FS144AXNNN-CL (APC) UCS-FS144UXNNN-CL (UPC)	144 port SC UCS Enclosure (14 in W x 14 in H x 8 in D) with two 1.2-inch Closed Cap ports on top and two Rubber Cone Grommet ports on bottom
ADPSCA6	Adapter Kit, SC-APC No Flange, Standard Grade, 6 per pack
ASUPC-03-N	Adapter Kit, SC-UPC No Flange, Standard Grade, 4 per pack

This product may be protected by one or more patents • For further information, please visit: [www.ppc-online.com/patents](http://www.ppc-online.com/patents)

customerservice@ppc-online.com • 1-800-800-6652 • [www.ppc-online.com](http://www.ppc-online.com)