
F Male Splice Connector

A BELDEN BRAND

Features & Benefits

- Nickel-plated brass body construction
- Dual 7/16” Hex external surfaces
- Dual 3/8-32 UNEF-2B internal threading
- 3/8” 32UNEF Threads
- Nickel-Plated Brass Construction

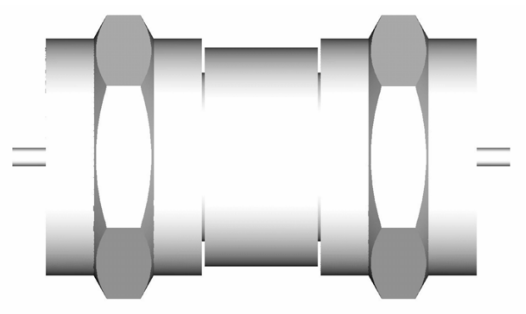

Overview

The PPC F71 splice adapter offers superior electrical, environmental, and mechanical performance beyond industry standards, ensuring superior network performance.

Technical Data

General Specifications

Parameter	Unit
Bandwidth	0 Mhz to 1 GHz
Insertion Loss	< 0.5 dB
Return Loss	< 20 dB
Impedance	75 Ohms
Operating Voltage Rating	8-Ampere DC continuous

Ordering Information

Part Number	Description
CF71M	F Male to F Male Splice Connector

r2_03282025

These products may be protected by one or more patents. For further information, please visit: www.ppc-online.com/patents

6176 E. Molloy Rd. East Syracuse, NY 13057
bbs.cs@belden.com
1-800-800-6652 • +1 315-431-7200