
FTTA Outdoor Armored Jumper

A BELDEN BRAND

Features & Benefits

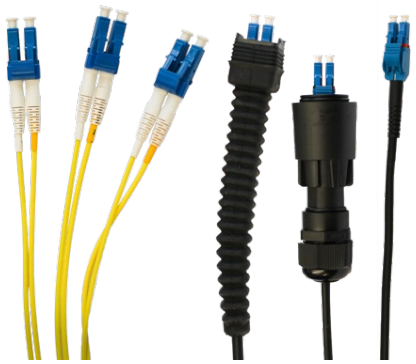

- Designed for outdoor wireless applications
- LSZH outdoor rated cable jacket containing water blocking aramid yarn
- Operating temperature -30 °C to 70 °C (-22 °F to 158 °F)
- Single-mode fiber type 9/125
- LC/UPC connections
- Armor material: Stainless Steel
- Dual LC to Hardened Dual LC
- Dual LC to Dual LC IP-RC (compatible with FullAXS® by TE and Ericsson radio*)
- Dual LC to Dual LC NSN® (compatible with Nokia Siemens radio*)
- Pulling sock included
- Standard lengths from 3 ft to 300 ft
- End A radio side breakout 12 inches
- End B Dual LC breakout 18 inches
- Factory tested and performance certified
- Lengths shorter than 100 ft individually bagged / lengths 100 ft and greater reel packaged

Overview

FTTA (Fiber to the Antenna) cables for wireless radio connections or other environmentally-challenging applications. These assemblies are designed to be compliant with Telcordia standards: GR-20, GR-2866, GR-3120, and GR-326 and LC connectors meet TIA 568 and FOCIS 10.

Applications

- **FTTA –** Fiber to the Antenna, CPRI, eCPRI, 5G (low, mid and high bands), CBRS, and LTE
- **Wireless –** Small Cell, Remote Radio Unit, Macro, MVNO Network Offload, and Fixed Wireless
- **Telecom –** MDU, MTU, FTTX with Outdoor Requirements

***PPC is not affiliated with, and does not claim ownership of, any products or intellectual property sold or owned by Nokia, TE Connectivity or Ericsson**

These products may be protected by one or more patents. For further information, please visit: www.ppc-online.com/patents


6176 E. Molloy Rd. East Syracuse, NY 13057
bbs.cs@belden.com
1-800-800-6652 • +1 315-431-7200

FTTA Outdoor
Armored Jumper

A BELDEN BRAND


Mechanical Drawings

Armored Jumper Dual LC to Dual LC

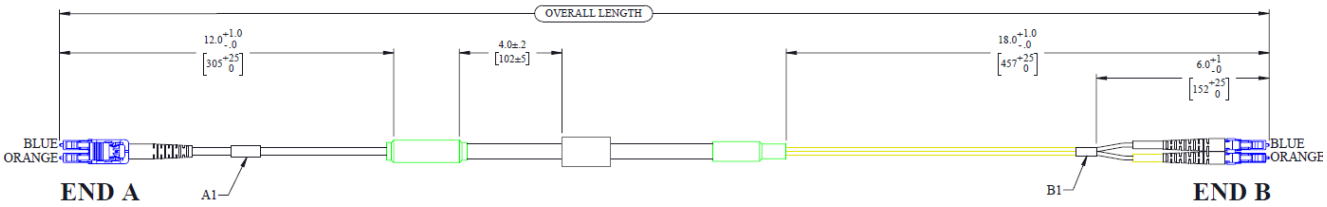


Length (L)	Tolerance
< 1 meter	+50mm/-0
1 meter </= L, </= 10 meters	+100mm/-0
L > 10 meters	+1%*L/-0

Dual LC NSN® to Dual LC

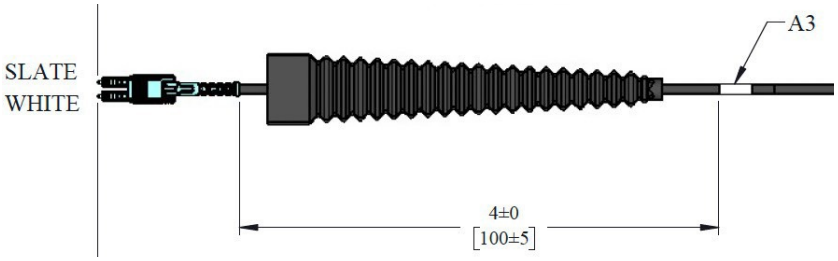

Dual LC IP-RC to Dual LC

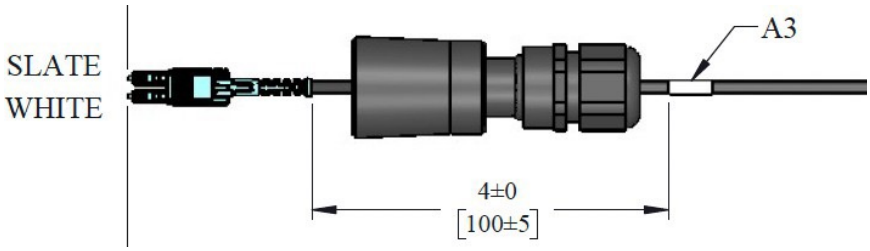

***PPC is not affiliated with, and does not claim ownership of, any products or intellectual property sold or owned by Nokia, TE Connectivity or Ericsson**

FTTA Outdoor
Armored Jumper

A BELDEN BRAND

Ordering Information

Example	05	A	S	02	DLU	-	DLU	030	F	E
Character	1	2	3	4	5	-	6	7	8	9

EXAMPLE: 04AS06DLU-DLU030FE

1. Series
XX – Series No

2. Cable Type
A - Outdoor Armored

3. Fiber Mode
SM - Single Mode

4. Number of Fiber
02 – 02F

5. End A Connector
DUN - Dual LC UPC - NSN
DUR - Dual LC UPC - IPRC
DLU - Dual LC UPC

6. End B Connector
DLU - Dual LC UPC

7. Length
002 – 2 Units
100 – 100 Units

8. Unit of Measure
F = Feet
M = Meters

9. Pulling Sock
E – Both Ends – Expando
F – Both Ends – IP67

r2_07012025

***PPC is not affiliated with, and does not claim ownership of, any products or intellectual property sold or owned by Nokia, TE Connectivity or Ericsson**