
Wi-Fi PoE Terminal

A BELDEN BRAND

Features & Benefits

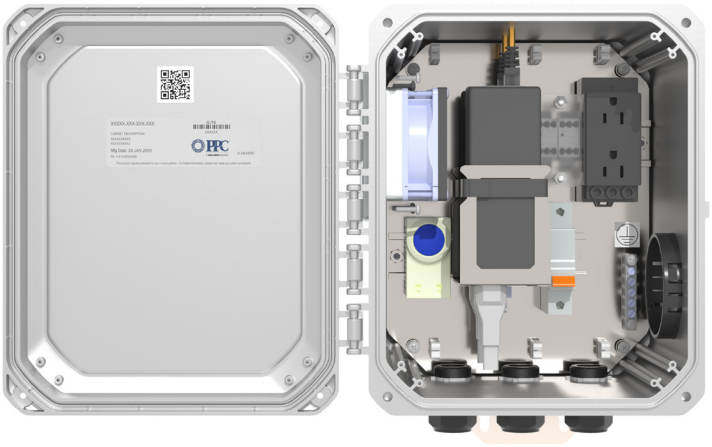

- Outdoor rated and designed to meet NEMA 3R
- Durable polycarbonate .125” terminal
- Top and bottom brackets for pole or panel mounting
- Filtered louvres for optimal ventilation and protection
- Developed specifically for wireless applications
- Three cable glands
- One exhaust fan - (AC, 20 CFM)
- One distribution block
  Black, Load, 6 output 26 to 14 AWG stranded
- One distribution block
  White, Neutral, 6 output 26 to 14 AWG stranded
- Base cabinet features:
  - Two DIN rails
  - Sealed cover with security screws
  - 72-inch 6 AWG ground cable included
  - Three included cable glands to accommodate cables .250-.490 inch
  - Pre-installed components (consult factory for custom configurations)
  - Duplex 120V outlet
  - AC circuit breaker
  - Distribution blocks for secure electrical connections
  - Pre-wired connections
  - Bracket designed to accept two industry standard Ethernet POE injectors [140mm x 53mm x 35mm]
  - AC fan

Overview

The PPC Wi-Fi PoE Terminal is designed to accept and protect Ethernet PoE injectors in indoor and outdoor applications. The terminal is pre-wired to accept AC power to be supplied to the injectors and power the cooling fan. PoE power can then be distributed using Ethernet cable to wireless devices outside of the terminal. The pre-configured design reduces network installation time while providing maximum component protection to minimize network downtime.

Technical Data

Dimensions (H x W x D)	Value
WITHOUT brackets and external hardware	10.4 in x 8.4 in x 7.2 in
WITH brackets and external hardware	13.4 in x 8.4 in x 7.2 in


These products may be protected by one or more patents. For further information, please visit: www.ppc-online.com/patents

6176 E. Molloy Rd. East Syracuse, NY 13057
bbs.cs@belden.com
1-800-800-6652 • +1 315-431-7200

Wi-Fi PoE Terminal

A BELDEN BRAND

Technical Drawing

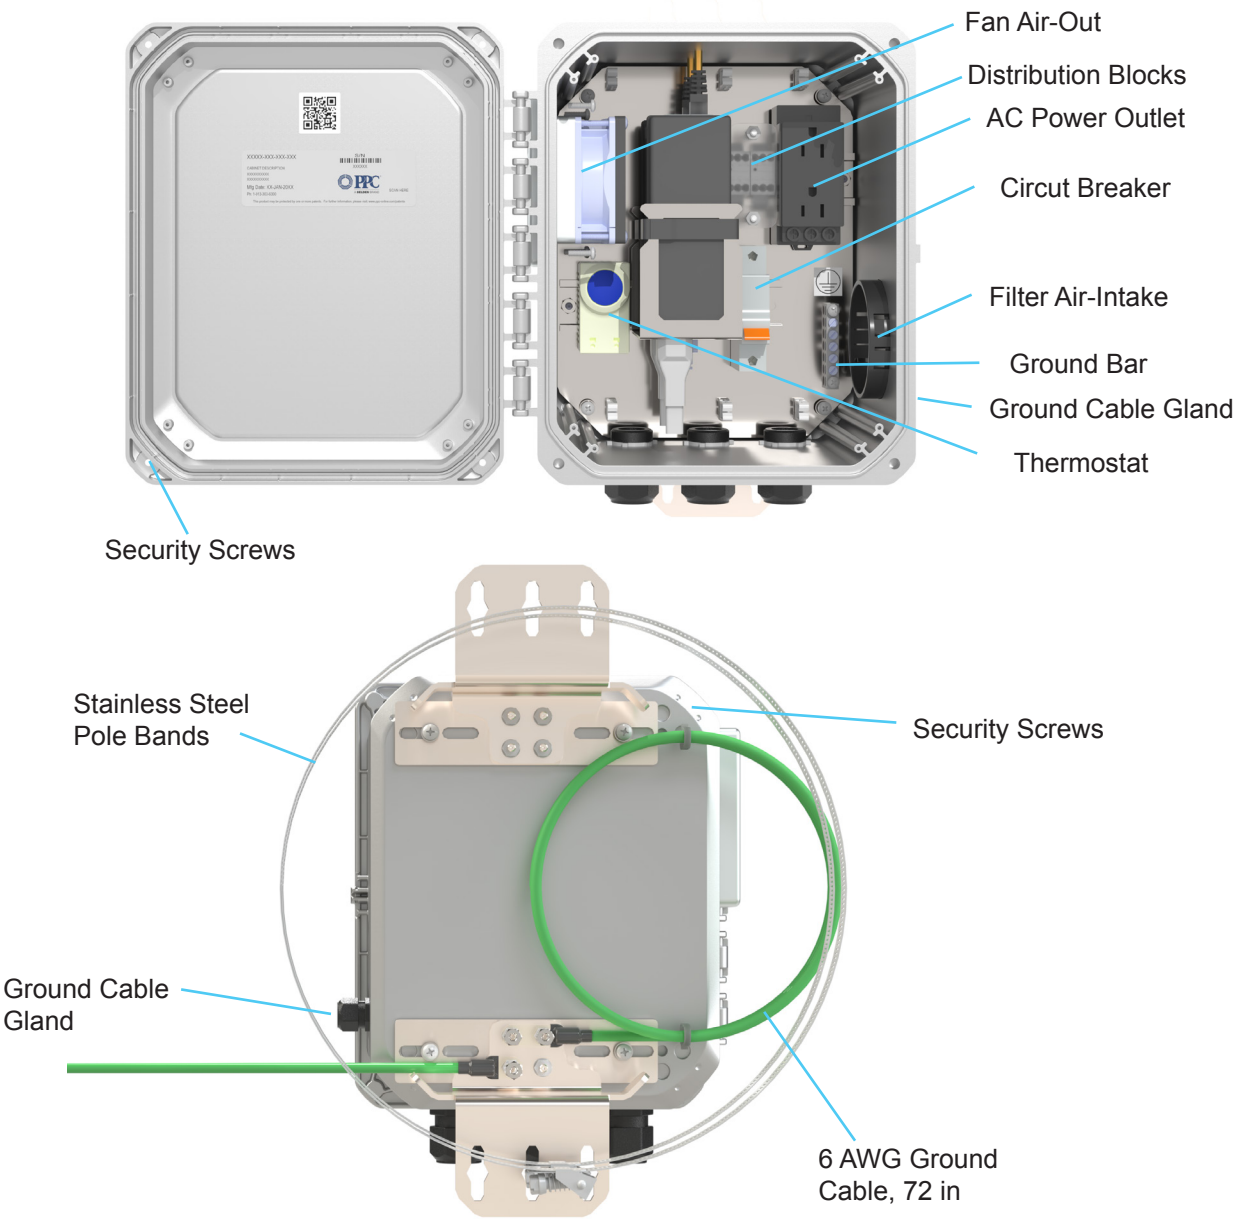

Ordering Information

Part Number	Description
TM1H01A2B3C2D0NJ1	Terminal, (2) DIN rails, (2) filtered louvres, ground wire, (3) cable glands, AC power outlet, AC exhaust fan, (6) position load and neutral terminal blocks, 16A circuit breaker, pre-wired

r2_01062026