


PPC Heat Shrink

Medium wall polyolefin tubing



Features & Benefits

- Dual wall cross-linked polyolefin
- Thermal melt adhesive liner
- Excellent sealing, insulation, protection property
- Thermo-chromatic paint changes color for proper installation
- Operating temperature: -55°C~100°C (-67°F~230°F)
- Shrink temperature: 125°C (257°F)
- Shrink ratio: 3:1
- Halogen Free

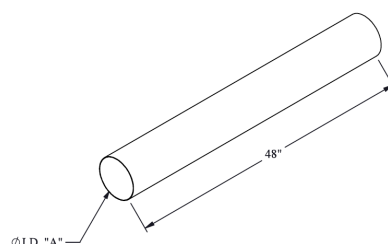

Overview

PPC's heat shrink is a hot melt adhesive with high shrink ratio, which provides excellent insulation and protection to cable joints and terminations. The abrasion and corrosion resistant heat shrink can be applied to communication cable and chemical pipes.

Ordering Information

PPC Part Number	"A"	Description
PHST-1.1-48	1.1 in	Heat Shrink, 3:1 Ratio, 1.1 in ID, 48 in Tube
PHST-1.3-48	1.3 in	Heat Shrink, 3:1 Ratio, 1.3 in ID, 48 in Tube
PHST-1.5-48	1.5 in	Heat Shrink, 3:1 Ratio, 1.5 in ID, 48 in Tube
PHST-1.7-48	1.7 in	Heat Shrink, 3:1 Ratio, 1.7 in ID, 48 in Tube