

General Description:

11 Series, Tri-shield, 77% Braid, Perfect Prep™, Footage Marked, Reel Package

Center Conductor: Copper clad steel

Nominal Diameter: 0.064" (1.63 mm)

Dielectric: Closed cell foamed polyethylene

Nominal Diameter over Dielectric: 0.280" (7.11 mm)

Shield:

1st Shield: APA laminated tape bonded to dielectric


Nominal Diameter over Tape: 0.288" (7.29 mm)

2nd Shield: 34 AWG aluminum braid wire; 77% coverage

3rd Shield: APA laminated tape

Jacket: Black PVC

Nominal Diameter over Jacket: 0.400" (10.16 mm)

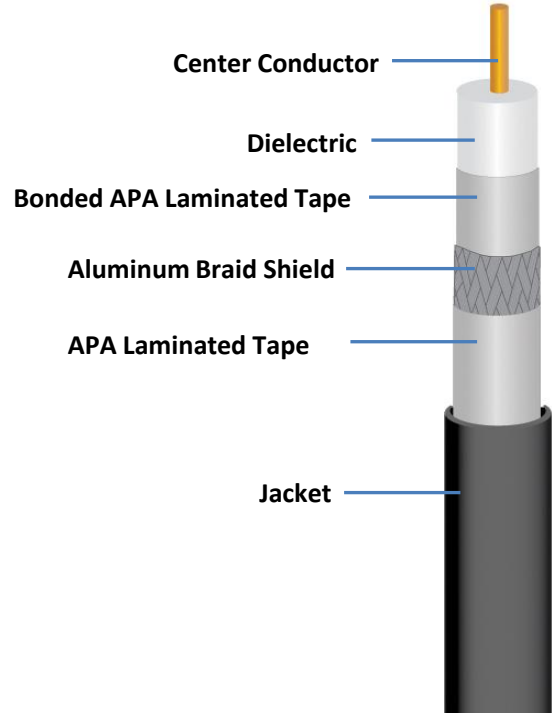

Frequency (MHz)	Maximum (dB/100ft)	Maximum (dB/100 m)
5	0.36	1.18
55	0.95	3.12
211	1.81	5.94
250	1.98	6.50
300	2.17	7.12
350	2.36	7.74
400	2.53	8.30
450	2.69	8.83
500	2.85	9.35
550	3.01	9.88
600	3.16	10.37
750	3.58	11.75
870	3.90	12.80
1000	4.23	13.88

NEC Rated: NEC CATV

Electrical Properties:

Impedance: 75 +/- 3 Ohms

Velocity Propagation: 85% Nominal

Cable Length Per Reel: 1000 ft. (305 m)

Shipping Weight: 64 lbs./1000 ft.

Packaging: 18"x6"x11" (45.7x15x28 cm)



Unless otherwise specified, dimensions, material, electrical and mechanical specifications shall comply with ANSI SCTE 74

*Cable image for reference only. Please refer to jacket description for color.

