
CF81 Coaxial Wall Plate

A BELDEN BRAND

Features & Benefits

- Four-point contact eliminates common path distortion
- Beryllium Copper for maximum conductivity, connection repeatibility and corrosion resistance
- Nickel-plated brass construction
- Flat surface ensures maximum ground plane engagement

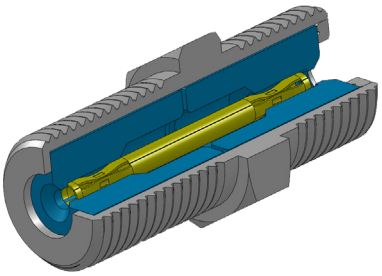

Overview

The PPC coaxial wall plates contain “F” female adapters with contacts designed to spin freely within insulators, reducing the threat of damage to contact points. The Beryllium Copper 4-point center conductor contact also provides superior conductivity, connection repeatabilty, and corrosion resistance.

Technical Data

Specification	Range	S.R.L	I.L
Bandwidth	0 GHz to 2 GHz	>30 dB	<.05 dB
	2 GHz to 3GHz	>25 dB	<.10 dB

Specification	Value
Impedance	75 Ohms (nominal)
Operating Temperature	-40°F to + 140°F (-40°C to 60°C)

Ordering Information

Part Number	Description
WP1HPI	Wall Plate, ivory, single 3GHz CF81GHZM
WP1HPW	Wall Plate, white, single 3GHz CF81GHZM
WP2HPI	Wall Plate, ivory, double 3GHz CF81GHZM
WP2HPW	Wall Plate, white, double 3GHz CF81GHZM



WP1HPI



WP1HPW



WP2HPI



WP2HPW

r1_11032025

6176 E. Molloy Rd. East Syracuse, NY 13057
bbs.cs@belden.com
1-800-800-6652 • +1 315-431-7200

www.ppc-online.com