

Drop Ancillary

Right Angle F81 Adapter



Overview

Ports aren't always conveniently located, whether in a crowded pedestal or behind a piece of furniture, where space is at a premium. PPC's RAPLUS adapter prevents damage to cable, connectors and ports by offering a SignalTight® solution that protects signal integrity. The 90° adapter provides a tech-friendly way to make installation in a tight space easier, while maintaining class-leading electrical and mechanical performance.




Technical Data

Electrical Specifications

Bandwidth	0 MHz to 3 GHz
Impedance	75 Ohms (nominal)
Return Loss (Gated)	
5 to 1,000 MHz	-30 dB Minimum
1,000 to 2000 MHz	-30 dB Minimum
2,000 to 3,000 MHz	-20 dB Minimum
Shielding Effectiveness	-120 dB Minimum
Corrosion Resistance	Meets SCTE and Belcore per ATSM 8117 (1000 hour salt fog)
Operating Temperature	-40 °F to 140 °F (-40 °C to 60 °C)
Moisture Migration	Meets SCTE IPS-TP-013 when paired with PPC approved products (Red-dye moisture migration test)

Meets or Exceeds all SCTE Specifications

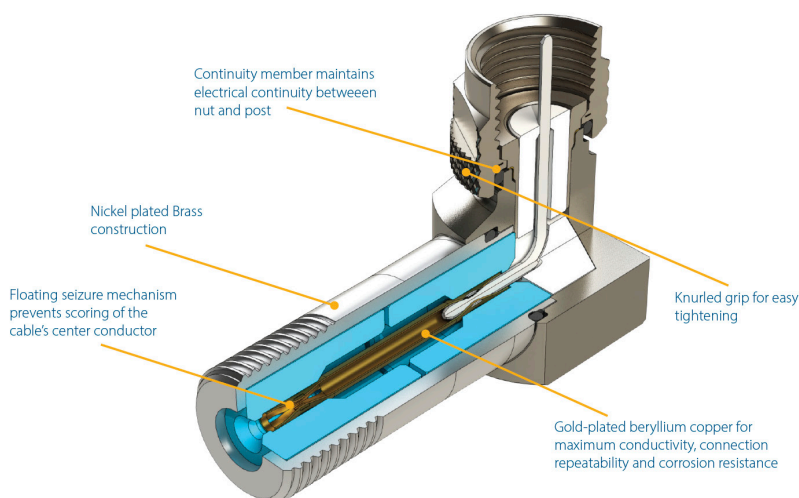

Ordering Information

PPC Part Number	Description
RAPLUS	Right Angle F81 Adapter