


# 10mm Microduct Coupler



## Mechanical Drawing

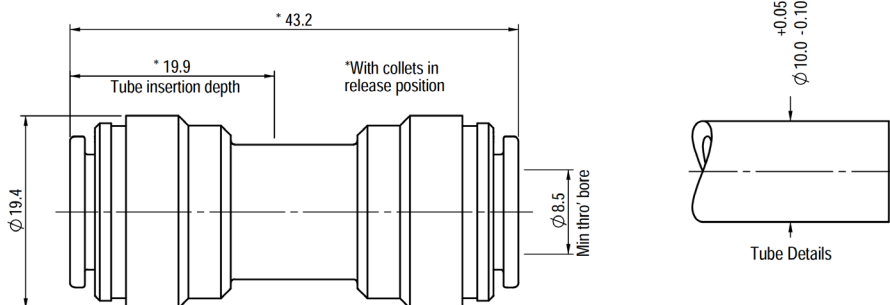

## Technical Data

Specification	Rating
Temperature (Air)	-10°C to 40°C (14°F to 104°F)
Blowing Pressure (max)	16 bar
IP Protection	IP68
Tensile Stress	150 N
Crush Resistance*	450N
Lifetime	10 years
Hermitically sealed to 70 kPa	---

\*per BS EN 50411

## Materials

Part Description	Material
Body	Polycarbonate (Unfilled), Clear
Collets	Acetal Co-polymer (Unfilled), Black & Stainless Steel
'O' Rings	Nitrile, Black

## Ordering Information

Part Number	Description
10-0282	10mm x 10mm connector

This product may be protected by one or more patents • For further information, please visit: [www.ppc-online.com/patents](http://www.ppc-online.com/patents)

6176 E. Molloy Rd. East Syracuse, NY 13057 U.S.A. • [customerservice@ppc-online.com](mailto:customerservice@ppc-online.com) • 1-800-800-6652 • +1 315-431-7200 • [www.ppc-online.com](http://www.ppc-online.com)

rev2\_08062021