

Pre-terminated Outlet PTO Premium, flush-mount




Features & Benefits

- Strain relief for cable or fibre optics
- Base plate made of metal
- 360° cable entry possible
- Field for labelling
- ergonomic design
- Colour: white



Technical Drawing

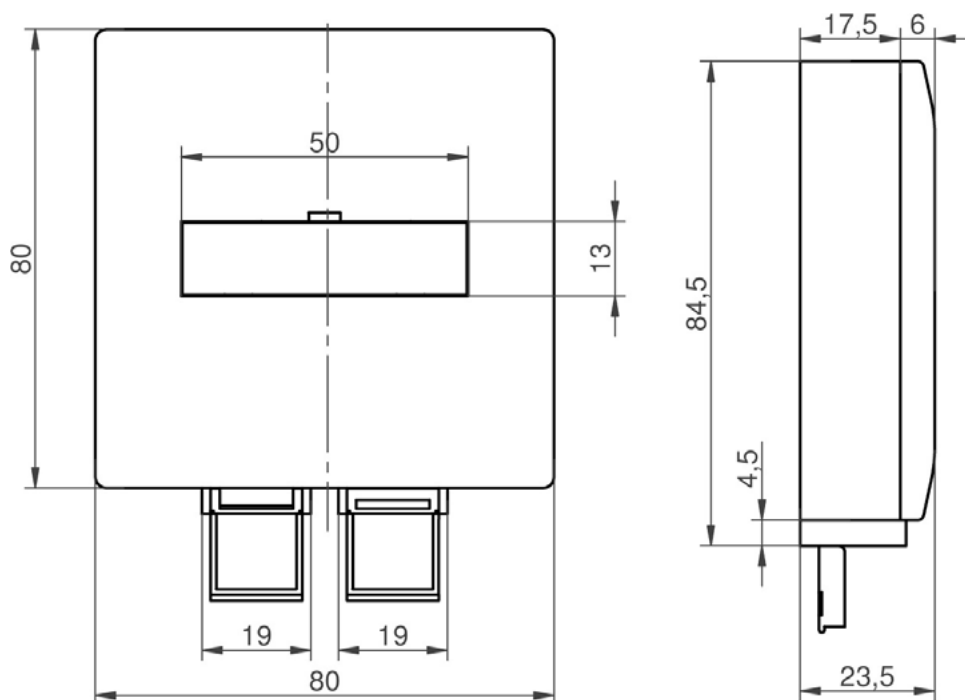

Pre-terminated Outlet PTO Premium, flush-mount



Ordering Information

Example	PTOC	3	6	2	6	8	3	2	2	1	2	2	1	1	0
		1	2	3	4	5	6	7	8	9					

1 Adapter Type

15 = LC Duplex Blue Flanged
 16 = LC Duplex Green Flanged
 35 = SC Simplex Blue Flanged
 36 = SC Simplex Green Flanged
 53 = LC Duplex Blue Internal Shutter Flanged
 54 = LC Duplex Green Internal Shutter Flanged
 57 = SC Simplex Blue Internal Shutter Flanged
 58 = SC Simplex Green Internal Shutter Flanged

2 Adapter Quantity

1 = 1
 2 = 2

3 Cable Type

52 = 2F Indoor G657.A1
 53 = 4F Indoor G657.A1
 54 = Miniflex® 2F 2mm G657.A1
 55 = Miniflex 4F 2mm G657.A1
 56 = Miniflex 2F 3mm G657.A1
 57 = Miniflex 4F 3mm G657.A1
 66 = 2F Indoor cable G657.A2
 67 = 4F Indoor cable G657.A2
 68 = Miniflex 2F 2mm G657.A2
 69 = Miniflex 4F 2mm G657.A2
 70 = Miniflex 2F 3mm G657.A2
 71 = Miniflex 4F 3mm G657.A2

4 Connector Outlet

11 = LC/UPC Simplex
 12 = LC/APC Simplex
 31 = SC/UPC Simplex
 32 = SC/APC Simplex

5 Connector Quantity Outlet

1 = 1
 2 = 2
 3 = 3
 4 = 4

6 Connector Pulling End

00 = No connector
 11 = LC/UPC Simplex
 12 = LC/APC Simplex
 31 = SC/UPC Simplex
 32 = SC/APC Simplex
 82 = SC UPC Balistix (1F Only)
 83 = SC APC Balistix (1F Only)
 84 = LC UPC Blow-In Connector
 85 = LC APC Blow-In Connector
 86 = SC UPC Blow-In Connector
 87 = SC APC Blow-In Connector
 88 = LC UPC Balistix (1F Only)
 89 = LC APC Balistix (1F Only)

7 Connector Quantity Pulling End

See Connector Quantity Outlet (5.)

8 Pull-in Loop

1 = Yes
 2 = No

9 Product Length

05 = 5 Meters
 10 = 10 Meters
 50 = 50 Meters