

GPON OLT C++ Optical Module



Features & Benefits

- Supports ITU-T G.984.2 GPON OLT C++ application
- Single fiber bi-directional data links with symmetric 2.488Gbps Tx and 1.244Gbps Rx
- 1490nm continuous-mode transmitter with DFB LD
- 1310nm burst-mode receiver with APD-TIA
- 2-wire interface for integrated digital diagnostic Monitoring
- Receiver RESET, Signal Detect, RSSI function indication (RESET, RX_SD, RSSI)
- SFP package with SC/UPC receptacle optical interface
- Single +3.3V power supply
- Operation case temperature 0 °C to 70 °C (32 °F to 158 °F)
- RoHS6 compliance



Technical Data

All performance is specified at whole working temperature and conditions

Transmitter Characteristics

Specification	Unit	Min.	Typical	Max.
TX Central Wavelength	nm	1480	1490	1500
Spectral Width (-20dB)	nm			1
Side Mode Suppression Ratio (SMSR)	dB	30		
Mean Launched Power	dBm	4.5		7
Mean Launched Power (TX Off)	dBm			-45
Extinction Ratio	dB	8.2		
Optical Return Loss Tolerance	dB	-12		
Transmitter and dispersion Penalty	dB			1
Transmitter Mask(PRBS223-1@2.488G)	Compliant With ITU-T G.984.2			

Receiver Characteristics

Specification	Unit	Min.	Typical	Max.
Receive Wavelength	nm	1290	1310	1330
Sensitivity (PRBS223-1@1.244G,ER=10,BER<10 ⁻¹⁰)	dBm			-30
Overload (PRBS223-1@1.244G,ER=10,BER<10 ⁻¹⁰)	dBm	-12		
Receiver Burst Mode Dynamic Range	dB	15		
Damage Threshold for Receiver	dBm	5		
SD Assert Level	dBm			-33
SD De-assert Level	dBm	-45		
SD Hysteresis	dB	0.5		6
WDM Filter isolation to 1550nm	dB	38		
WDM Filter isolation to 1650nm	dB	35		

GPON OLT C++ Optical Module



Technical Data

Electrical Interface Characteristics

Specification	Unit	Min.	Typical	Max.
Data Input Swing Differential/TX	mV	200	-	2000
Data Output Swing Differential/RX	mV	400		1600
Date Differential Impedance	Ω	90	100	110
LVTTL Output High	V	2.4		Vcc
LVTTL Output Low	V	0		0.4
LVTTL Input High	V	2.0		Vcc+0.3
LVTTL Input Low	V	0		0.8


Timing Characteristics

Specification	Unit	Min.	Typical	Max.
Guard Time (Tg)	ns	25.6		
Reset Pulse Width (Tr)	ns			12.8
Reset Delay (Trd)	ns			12.8
Receiver Preamble Time (Tp)	ns			140
SD Assert Time (TSDA)	ns			100
SD De-assert Time (TSDD)	ns			12.8
RSSI Trigger Delay (Ttd)	ns	25		
RSSI Trigger Pulse Width (Tw)	ns	500		
Internal I2C Delay (Twait)	us			500

Environmental Data

Specification	Unit	Min.	Typical	Max.
Storage Temperature	°C (°F)	-40 (-40)		85 (185)
Operating Case Temp for C-temp	°C (°F)	0 (32)		70 (158)
Operating Relative Humidity	%	5		95
Power Supply Voltage	V	3.15	3.3	3.45
Supply Current	mA			600
Bit Rate for Tx	Gbps		2.488	
Bit Rate for Rx	Gbps		1.244	

Timing Sequence for RSSI

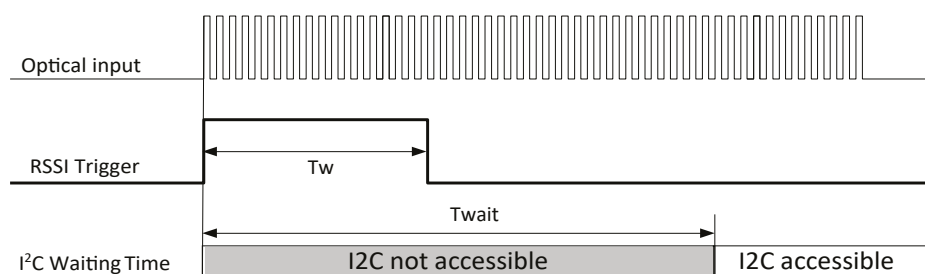


This product may be protected by one or more patents • For further information, please visit: www.ppc-online.com/patents


GPON OLT C++ Optical Module



Timing Sequence for Ranging Mode

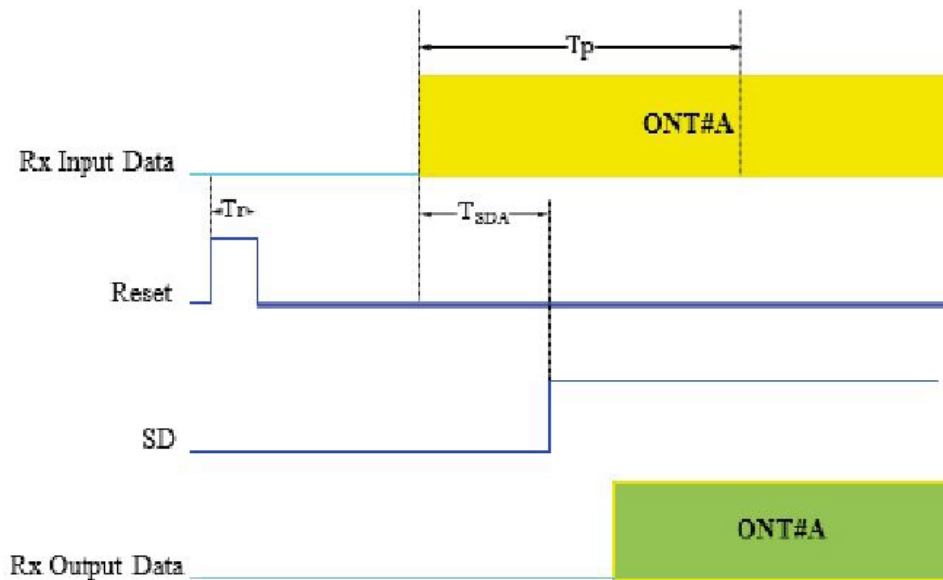

Timing Sequence for Working Mode

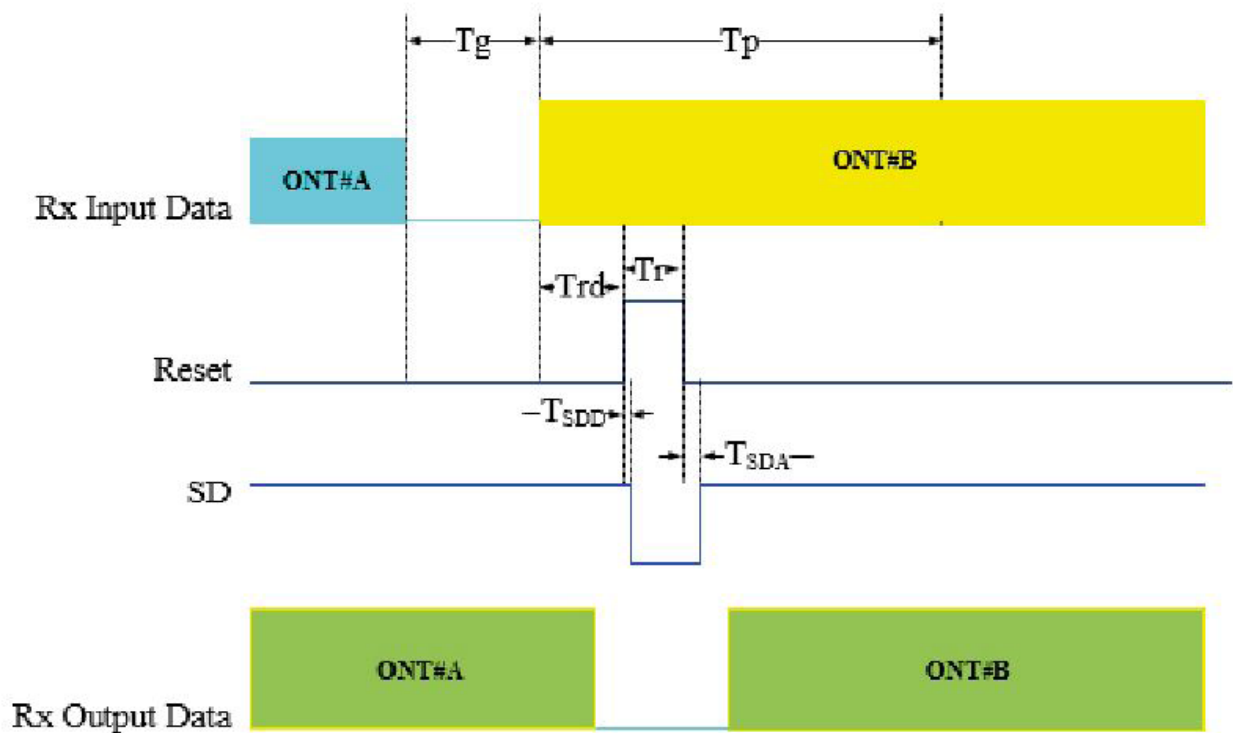


GPON OLT C++ Optical Module



Pin Definition

Pin No.	Symbol	Level /Logic	Description
1	VeeT		Module Transmitter Ground
2	Tx_Fault	LVTTTL-O	Module Transmitter Fault
3	Tx_DIS	LVTTTL-I	Laser output is disabled when this pin is asserted high or left unconnected
4	SDA	LVTTTL-I	2-Wire Serial Interface Data Line
5	SCL	LVTTTL-I/O	2-Wire Serial Interface Clock
6	MOD_ABS	LVTTTL-O	Module Absent, connected to ground in the module
7	RX_Reset	LVTTTL-I	Receiver RESET signal
8	RX_SD	LVTTTL-O	Receiver Signal Detected Indication
9	RSSI_TRIG	LVTTTL-I	Receiver RSSI Trigger signal
10	VeeR		Module Receiver Ground
11	VeeR		Module Receiver Ground
12	RD-	LVPECL-O	Receiver Inverted Data Output
13	RD+	LVPECL-O	Receiver Non-Inverted Data Output
14	VeeR		Module Receiver Ground
15	VccR		Module Receiver 3.3V Supply
16	VccT		Module Transmitter 3.3V Supply
17	VeeT		Module Transmitter Ground
18	TD+	LVPECL-I	Transmitter Non-Inverted Data Input
19	TD-	LVPECL-I	Transmitter Inverted Data Input
20	VeeT		Module Transmitter Ground

Recommended Interface Circuit

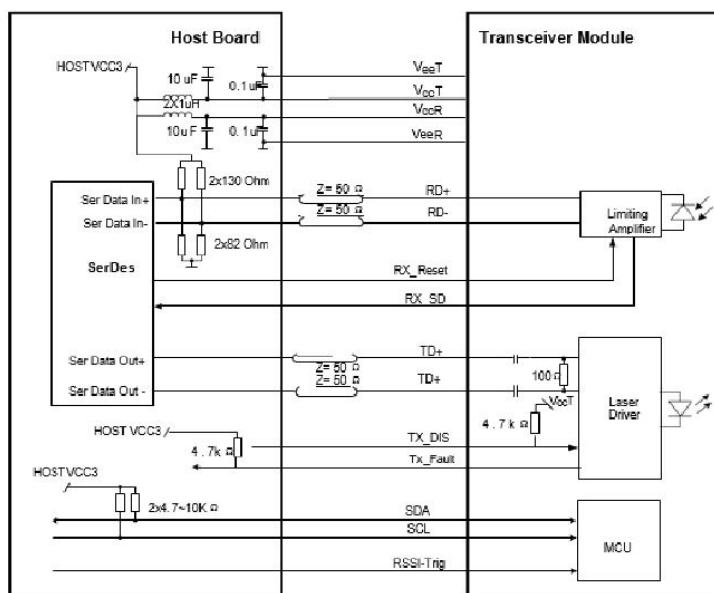


This product may be protected by one or more patents • For further information, please visit: www.ppc-online.com/patents

customerservice@ppc-online.com • 1-800-800-6652 • www.ppc-online.com

GPON OLT C++ Optical Module




EEPROM Information

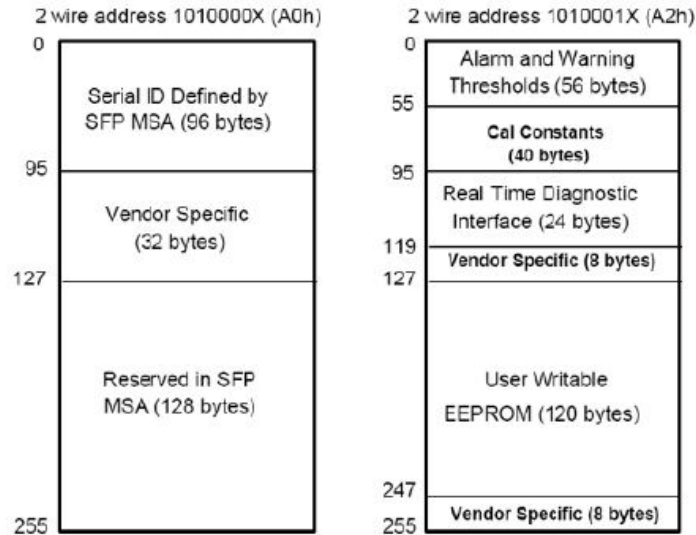

Technical Drawing

Only for V1 version mechanical housing, which PN is D34364-SSCA:

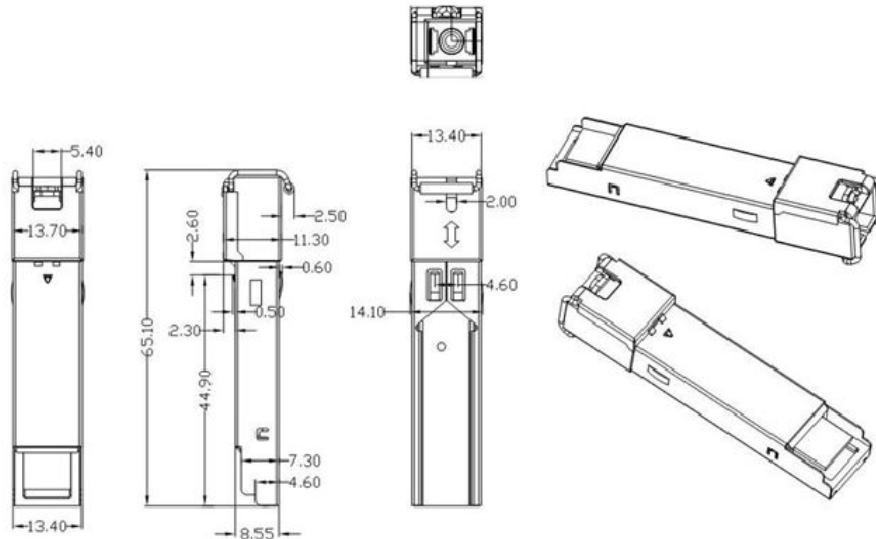


GPON OLT C++ Optical Module



Technical Drawing

Only for V2 version mechanical housing, which PN is D34364-SSCB:

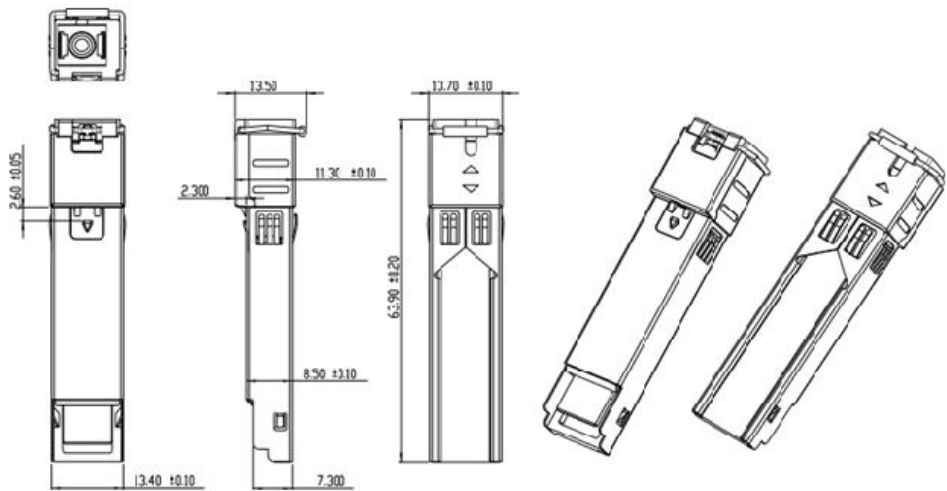

Ordering Information

Part Number	Description
SFPGPC2PSU	GPON OLT SFP C++ 20KM 1310/1490, 2.5G/1,25G neutral codes