

Sliding Patch Panel Unloaded



Features & Benefits

- Fast and easy access to front and rear connectors
- Wide range of connector types (SC and LC standard)
- Suitable for pigtail splicing or IFC Breakout cables
- Wide range of cable types can be installed at the rear
- Various anchoring points for incoming cables
- Clear port identification strip on front plate
- Fiber management kits and splice cassette are offered as accessories
- All panels are available pre-loaded with adapters, pigtails and splice accessories




Overview

The PPC Fiber Optic 19-inch Sliding Patch Panel has been designed to facilitate internal fiber management and also to maximize fiber density in 1U, 2U and 4U height increments. The sliding tray provides easy access to fiber cabling, making this panel ideal for 'Pay as you Grow' applications. The panel supports 24 way, 48 way and 96 way configurations in SC Simplex, SC Duplex, ST/FC (D cut out), LC Duplex (SC simplex foot print), LC Quad (SC Duplex foot print). Versions are available with MTP MPO cut-outs on the back for use with pre-terminated MTP/MPO trunks.

Technical Data

Specification	Value
Dimensions (W x D x H)	483 mm x 235.2 mm x 43 mm (19.0 in x 9.3 in x 1.7 in)
Material	Steel powder-coated
Height variants	1U, 2U and 4U

Technical Drawing

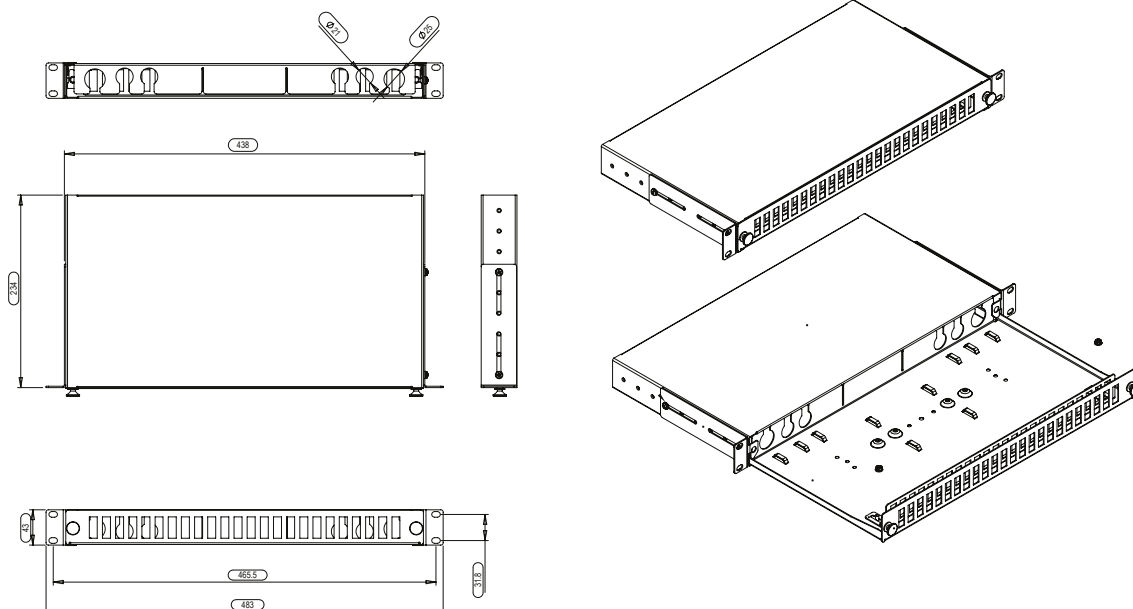

Sliding Patch Panel Unloaded



Ordering Information

FPSL

1

2

3

4

-
- | | | | |
|-----|---|-----|---|
| 01. | Select cut-out type
SCSX- = SC simplex
SCDX- = SC duplex
DCSX- = ST/FC 'D' cut-out | 03. | Select panel height in 'U'
1 = 1U
2 = 2U
4 = 4U |
| 02. | Number of fibers per panel
012 = 12 fibers
024 = 24 fibers
048 = 48 fibers | 04. | Select panel color
G = Gray powder coated
B = Black powder coated |