

Miniflex[®] QuikPass[™] Cable




Datasheet

The Miniflex[®] QuikPass Cable is a 12 fiber indoor distribution cable for connecting subscribers to the network. It utilizes a tough, engineering grade polymer outer jacket to offer class leading crush and kink resistance.

Manufactured with the ultra-low friction DVC lining, individual fibers can be cut and retracted much greater distances than competing hallway pull-back cable solutions. In routes that contain multiple bends, is it easy to cut and extract in excess of 20 meters (65 feet) of fiber, which can then be field spliced/terminated or pushed into corresponding Miniflex Protection Tubing.

The tough outer jacket of the Miniflex QuikPass Cable makes it ideally suited for fixing to walls using traditional cable clips, tacks/staples or, by virtue of the Miniflex grooves, using the dedicated Miniflex cable clips.

The Miniflex QuikPass Cable is so rugged that standard cutting tools struggle to penetrate the tough outer jacket. However, when window-cut using the dedicated PPC Window Cutting Tool, opening the cable is simple, easy and safe.

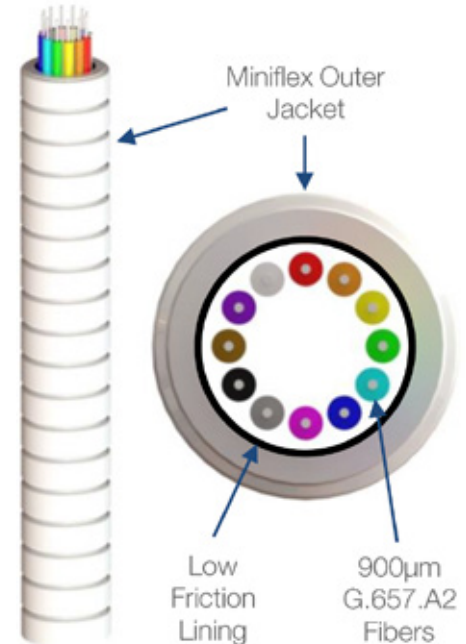

Advantages

- Ultra tough, flexible Miniflex jacket
- Loose tube with low friction lining for simple fiber extraction
- Flame retardant / LSZH polymer with UV resistance
- Bend insensitive G.657.A2 optical fibers

Part No.	10-1426	10-1344
Reel Length	100 m	1000 m
Reel Weight	4 kg	40 kg
Reel Dimensions	Ø400mm x 150mm	Ø750 x 400mm

Applications

- Multi-dwelling units
- Commercial offices
- Schools and campuses
- Hotels and resorts

Compatibility List

- Miniflex 8mm wall clips
- G.657A2 optical fiber
- Fusion and mechanical splice
- PPC window cutting tool

O.D	FiberCount	Fiber Type	Operating Temp.	Fire Retardancy	Colour
8.0 mm	12	G.657A2 900 µm	-10°C to +50°C	UL 94: V0 / LSZH	White (RAL 9010)

EMEA SALES
t: +44 1728 726 600
e: customerservice@ppc-online.com

USA SALES
t: +1 315-431-7200
e: customerservice@ppc-online.com

WWW.PPC-ONLINE.COM