

ThermalPro® Compact Outdoor Equipment Cabinets



Features & Benefits

- Compact, full featured general purpose cabinets
- Ideal for small scale and limited space applications
- Telecordia GR-487 compliant
- Broad selection of options to tailor-fit to any application
- Available fully integrated as a turn-key solution

Features

- Single bay outdoor equipment cabinet
- Available as 3-4RU, 6RU and 9RU cabinet sizes
- Optional 14.5" H battery pedestal
- Optional 6" H pad mount plinth
- Optional universal pole / wall mount brackets
- Fixed racks, 19"
- Front and rear swing out panels for protection mounting
- Front door with wind-stop and padlock hasps
- Rear access panel or door (TP90 only)
- Double wall roof for protection against solar load
- Environmental gasket seals for all access points
- Multiple cable entry locations
- Heavy-duty aluminum construction
- Durable powder coat paint finish



ThermalPro® 30



ThermalPro® 60



ThermalPro® 90

Overview

The ThermalPro® Access Series is a comprehensive line of general purpose cabinets with flexibility to fit in any industry. With a broad range of sizes and available options, the ThermalPro Access Series cabinets are well suited for a variety of applications. Whether it is cell site backhaul, fiber network distribution, transit or utilities, we have the expertise to configure these cabinets to fit your needs.

Optional Equipment

- Air conditioners, heat exchangers and fan systems
- AC power equipment: load centers, outlets, surge suppression
- DC power equipment: rectifier systems
- Battery back up strings and UPS systems
- Generator connectors and power meter bases
- Cabinet and battery heaters
- Fiber optic pigtails, splitters and distribution panels
- Protection or cross-connect panels

This product may be protected by one or more patents • For further information, please visit: www.ppc-online.com/patents

customerservice@ppc-online.com • 1-800-800-6652 • www.ppc-online.com

ThermalPro® Compact Outdoor Equipment Cabinets




Technical Data


Dimensions

ThermalPro® 30 (H x W x D)	ThermalPro® 60 (H x W x D)	ThermalPro® 90 (H x W x D)
3RU / 4RU	6RU	9RU
660 mm x 381 mm x 330 mm (26 in x 15 in x 13 in)	660 mm x 559 mm x 457 mm (26 in x 22 in x 18 in)	660 mm x 813 mm x 457 mm (26 in x 32 in x 18 in)


Mechanical Drawing

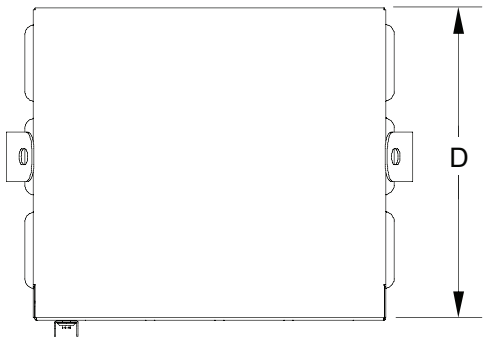

Top View

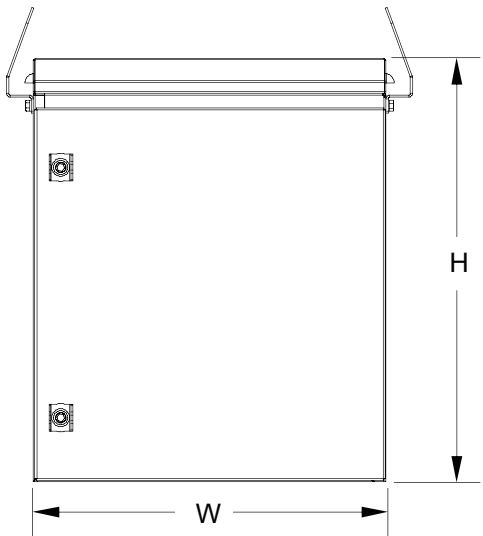

Front View

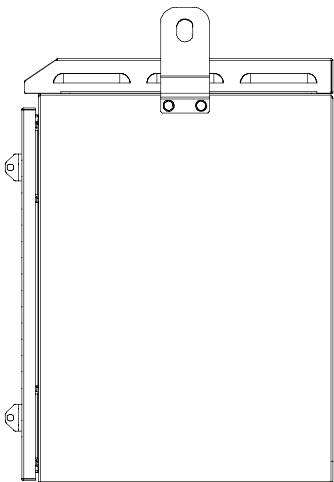

Side View