

Enclosures


QuikPush® Customer Terminal- Small



PPC's small customer terminal (QP-SCT) is a cost-effective, low-profile termination point for FTTH deployments.

The QP-SCT is typically located inside the customer dwelling and connects to the Network Access Point via PPC's pre-terminated QuikPush® drop cable. Compatible with SC and LC adapters, the small customer terminal provides the ideal solution for QuikPush® cables, with capacity to store up to 2 meters (6.5 ft) of slack 3mm Miniflex® cable.

Suitable for indoor use, the QP-SCT facilitates the use of the pre-terminated PPC QuikPush® drop cables within customer dwellings, between the network floor distribution point and the end user's Optical Network Terminal.

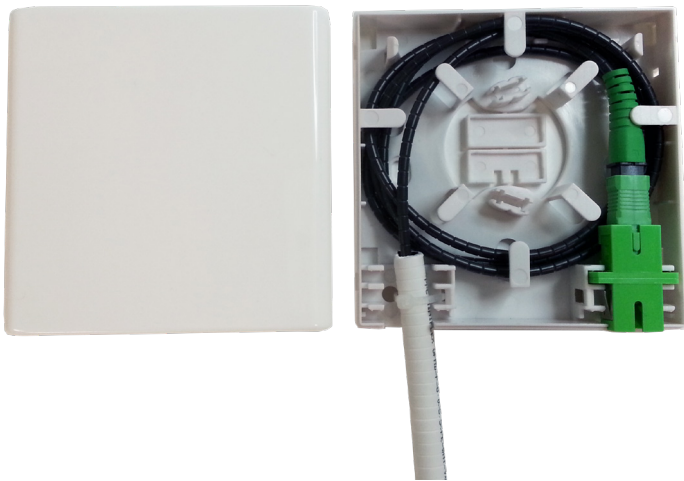

Advantages:

- Allows for 100% splice-less FTTH installations
- IP55 protection from dust and water
- Supplied with SC or LC duplex adapter
- Small footprint for minimum decor disruption
- Slack cable storage for up to 2 meters (6.5 feet) of Ø3mm Miniflex® cable
- Large cable entry port for PPC cable or microduct
- Supplied with wall fixings and cable ties

Applications

- Fiber To The Home
- Multi-Dwelling Units
- Premise installations
- Telecommunications

Compatibility List:

- All PPC and industry standard cable
- QuikPush™ cable connector (SC & LC)
- PPC Microduct



Customer Terminal Information

Part #	Connector Adapter	Dimensions	Weight (10pc)	Recommended Slack Storage	Max Slack Storage	Port Diameter	Order Pack Quantity	Operating Temp
QP-SCT	SC/APC	86(h) x (3.385") 86(w) x (3.385") 24 (d) mm (0.94")	1 kg (35.27 oz)	1 meter (3.2 ft)	2 meters (6.5 ft)	2-10mm	10 pcs	-20°C to +75°C (-4°F to 167°F)