English OK

2U Slack Storage Box

PPC®
A BELDEN BRAND

Features & Benefits

- 2U, 19” standard panel (IEC 60297-3)
- Pivoting design for fast and safe access
- Opening directions either to the left or to the right (standard)
- Two 1.05 meter pre-installed black conduit
- Rail fixing options: rear and front
- Outdoor and indoor installation
- Supplied with mounting brackets, screws, a laser warning sign and other fixing materials



Overview

The PPC 2U Slack Storage Box fits in any 2U space with a minimum depth of 300 mm. It’s made from aluminium and used in racks or cabinets where cable slack needs to be stored. The pivoting design makes it easy to gain access to the cables from the front. The cables can be guided to the left or right side, and are fed in through a pre-installed black conduit. The lateral mounting brackets allow the position of the box to be adjusted back and forth. The brackets can also be rotated to allow for rail fixing options in the rear or front. The PPC 2U Slack Storage Box is supplied with screws, a laser warning sign and other fixing materials.

Mechanical Data

Construction	Paint Finish
Aluminium	Powder coating, Light Grey, RAL 7035

Locking	Units
Plastic sliding lock	2

External Dimensions (WxHxD)	Weight
438 x 88 x 267 mm / 17.24 x 3.46 x 10.51 in	3,8 kg / 8.38 lbs


Environmental Data

Operating temperature	2011/65/EC RoHS	Environmental protection
-10 to 60 °C / 14 to 140 °F	Fully compliant	IP20


2U Slack Storage Box

Technical Drawing

524803001-LH-Z

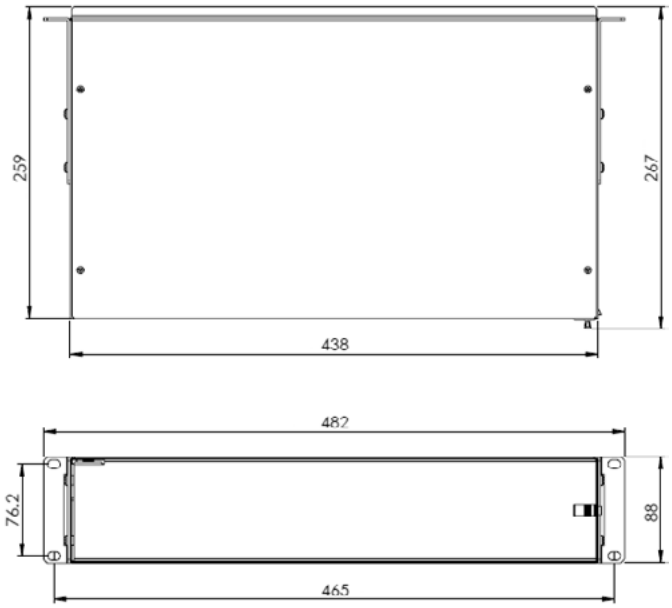

524803001-RH-Z

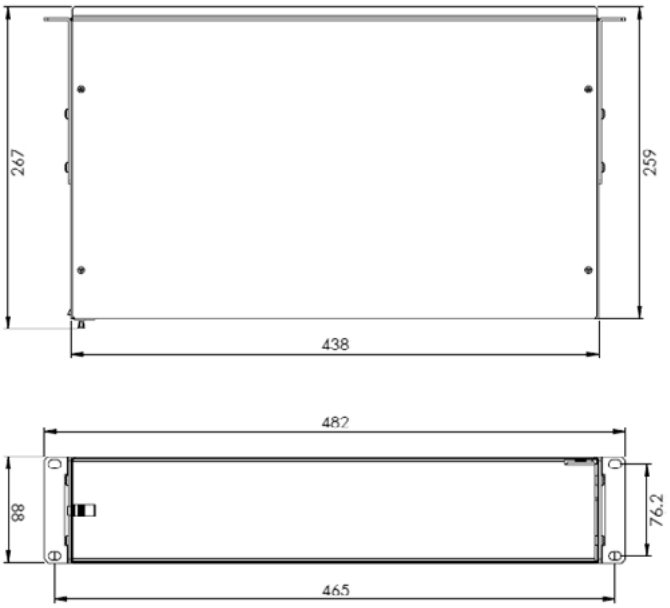

Ordering Information

Part Number	Description
524803001-LH-Z	2U Slack Storage Box, LH (opening direction to the left), 2x 1.05 meter pre-installed black conduit
524803001-RH-Z	2U Slack Storage Box, RH (opening direction to the right), 2x 1.05 meter pre-installed black conduit

r1_07112024