

General Description


CAT6 (350MHz), 4-Pair, U/UTP-Unshielded, Riser-CMR, CMX Outdoor, Premises Horizontal Cable, Film separator, Ripcord

Usage (Overall):

Premises Horizontal Cable, Outdoor, Riser, Gigabit Ethernet, 100BaseTX, 100BaseVG, ANYLAN, 155ATM, 622ATM

Performance Specifications

Specification	Value
Conductors: 4 Pairs	AWG: 23, Conductor Material: BC - Bare Copper
Insulation Material	PO-Polyolefin
Jacket	UV Resistant PVC (720 hr)
Nominal Diameter	0.250 in (6.35 mm)
Suitability	Indoor, Outdoor, Sunlight Resistant, Oil Resistant
Storage Temperature Range	-40°F to 167°F (-40°C To 75°C)
Installation Temperature Range	-4°F to 167°F (-20°C To 75°C)
Operating Temperature Range	-40°F to 167°F (-40°C To 75°C)
UL Temperature Range	75C (UL AWM Style 444)
Bulk Cable Weight	30 lbs/1000 ft
Max Recommended Pulling Tension	40 lbs
Min. Bend Radius/Minor Axis	0.750 in (19.05 mm)
Min. Bend/Installation	2.50 in (63.5 mm)

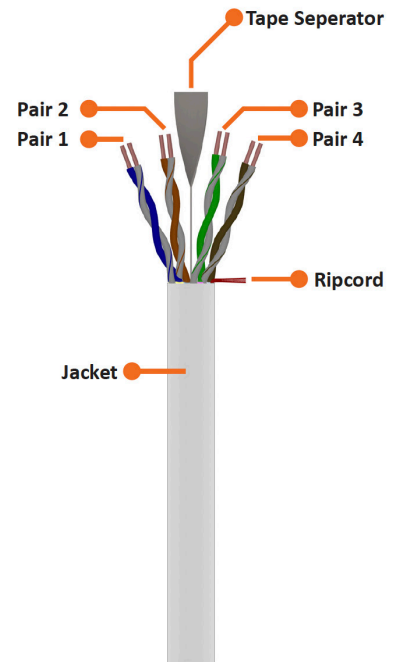

Electrical Properties

Specification	Value
Capacitance (pF/ft)	17
Delay (ns/100 m)	537 @ 100 MHz
DCR Unbalance @ 20°C	3%
Nominal Velocity of Propagation VP (%)	70
DCR @ 20°C (Ohm/100m)	7.3
NEC/(UL) Specification	CMG, CMR, CMX-Outdoor Telecommunications
Standards	Category 6 - TIA 568.C.2, UL444

Ordering Information

Example	PC6UVXM -	WHT	R	1000
Character	PC6UVXM -	1	2	3

1. Jacket Color	2. Packaging	3. Length
WHT = White	X = Reelex Box	1000 = 1,000 FT
BLK = Black	R = Reel	0500 = 500 FT*
GRY = Grey	A = Reel-in-Box	0750 = 750 FT**
	E = NexReel™	

*500 FT only available with the NexReel™

**750 FT only available with Reel-in-Box

Unless otherwise specified, dimensions, material, electrical, and mechanical specifications shall comply with ANSI/TIA/EIA-568-C.2 Cable image for reference only. Other colors, packaging, lengths available upon request